

Existence of minimizers in the geometrically non-linear 6-parameter resultant shell theory with drilling rotations

Mircea Bîrsan and Patrizio Neff

Mathematics and Mechanics of Solids published online 21 January 2013

DOI: 10.1177/1081286512466659

The online version of this article can be found at:

<http://mms.sagepub.com/content/early/2013/01/20/1081286512466659>

Published by:



<http://www.sagepublications.com>

Additional services and information for *Mathematics and Mechanics of Solids* can be found at:

Email Alerts: <http://mms.sagepub.com/cgi/alerts>

Subscriptions: <http://mms.sagepub.com/subscriptions>

Reprints: <http://www.sagepub.com/journalsReprints.nav>

Permissions: <http://www.sagepub.com/journalsPermissions.nav>

>> [OnlineFirst Version of Record](#) - Jan 21, 2013

[What is This?](#)

Existence of minimizers in the geometrically non-linear 6-parameter resultant shell theory with drilling rotations

Mircea Bîrsan

Fakultät für Mathematik, Universität Duisburg-Essen, Germany; Department of Mathematics, University 'A.I. Cuza' of Iași, Romania

Patrizio Neff

Lehrstuhl für Nichtlineare Analysis und Modellierung, Fakultät für Mathematik, Universität Duisburg-Essen, Germany

Received 3 October 2012; accepted: 11 October 2012

Dedicated to W Pietraszkiewicz, our friend and source of inspiration for the 6-parameter resultant shell model.

Abstract

This paper is concerned with the geometrically non-linear theory of 6-parametric elastic shells with drilling degrees of freedom. This theory establishes a general model for shells, which is characterized by two independent kinematic fields: the translation vector and the rotation tensor. Thus, the kinematical structure of 6-parameter shells is identical to that of Cosserat shells. We show the existence of global minimizers for the geometrically non-linear 2D equations of elastic shells. The proof of the existence theorem is based on the direct methods of the calculus of variations essentially using the convexity of the energy in the strain and curvature measures. Since our result is valid for general anisotropic shells, we analyze the particular cases of isotropic shells, orthotropic shells and composite shells separately.

Keywords

Geometrically non-linear elastic shells, existence of minimizers, 6-parameter resultant shell theory, Cosserat shells, drill rotations, calculus of variations

1. Introduction

In recent years there has been a revived interest in 2D shell models because of unconventional materials and extremely small aspect-to-thickness ratios, such as for instance thin polymeric films or biological membranes. For classical engineering materials and for non-extreme aspect-to-thickness ratios, available 3D FEM codes may readily be used such that the need for a truly 2D shell model does not arise anymore. However, for ultra-thin specimens the application of a 3D constitutive law is not clear at all. In these extreme cases one is led to employ a 2D shell model. This paper is concerned with one such model, the geometrically non-linear resultant

Corresponding author:

Patrizio Neff, Lehrstuhl für Nichtlineare Analysis und Modellierung, Fakultät für Mathematik, Universität Duisburg-Essen, Campus Essen, Thea-Leymann Str. 9, 45127 Essen, Germany.
Email: patrizio.neff@uni-due.de

theory of shells. We consider the 6-parameter model of shells which involves two independent kinematic fields: the translation vector field and the rotation tensor field (six independent scalar kinematic variables in total). This theory of shells is one of the most general, and it is also very effective in the treatment of complex shell problems, as can be seen from the works [15, 25, 51], among others. The resultant 6-parameter theory of shells was originally proposed by Reissner [55] and it has subsequently been developed considerably. An account of these developments and main achievements have been presented in the books of Libai and Simmonds [32] and Chróscielewski et al. [14]. In this approach, the 2D equilibrium equations and static boundary conditions of the shell are derived exactly by direct through-the-thickness integration of the stresses in the 3D balance laws of linear and angular momentum. The kinematic fields are then constructed on the 2D level using the integral identity of the virtual work principle. Following this procedure, the 2D model is expressed in terms of stress resultants and work-averaged deformation fields defined on the shell base surface. It is interesting that the kinematical structure of 6-parameter shells (involving the translation vector and rotation tensor) is identical to the kinematical structure of Cosserat shells (defined as material surfaces endowed with a triad of rigid directors describing the orientation of points). From this point of view, the 6-parameter theory of shells is related to the shell model proposed initially by the Cosserat brothers [20] and developed by many authors, such as Zhilin [65], Zubov [66], Altenbach and Zhilin [5], Eremeyev and Zubov [26] and Bîrsan and Altenbach [10]. Using the so-called derivation approach, Neff [38, 42] has independently established a Cosserat-type model for initially planar shells (plates) which is very similar to the 6-parameter resultant shell model. A comparison between these two models has been presented in the paper [11], in the case of plates.

On the other hand, we should mention that the kinematic structure of the 6-parameter shell model is different to the kinematic structure of the so-called *Cosserat surfaces*, which are defined as material surfaces with one or more deformable directors attached to every point (see [4, 6, 7, 35, 56, 57]). For instance, the kinematics of Cosserat surfaces with one deformable director is also characterized by six degrees of freedom (three for the position of material points and three for the orientation and stretch of the material line element through the thickness), which differ from the six degrees of freedom in the 6-parameter resultant shell model.

The topic of existence of solutions for the 2D equations of linear and non-linear elastic shells has been treated in many works. The results that can be found in literature refer to various types of shell model and they employ different techniques; see for example [1, 2, 8, 9, 21, 28, 30, 31, 58–64]. The method of formal asymptotic expansions is one method of investigation which allows for the derivation and justification of plate and shell models. The existence theory for linear or nonlinear shells is presented in detail in the books of Ciarlet [16–18], together with many historical remarks and bibliographic references. Another fruitful approach to the existence theory of 2D plate and shell models (obtained as limit cases of 3D models) is the Γ -convergence analysis of thin structures; see for example [41, 43, 45, 47, 48]. No existence theorem has been published in literature yet concerning the geometrically non-linear 6-parameter theory of elastic shells, as far as we are aware. In the case of *linear* micropolar shells, the existence of weak solutions has recently been proved in [22]. Existence results for the related (very similar) Cosserat-type model of initially planar shells have been established by Neff [38, 42]. In [41, 43, 45], the linearized version of this model has been analyzed and compared with the classical membrane and bending plate models given by the Reissner–Mindlin and Kirchhoff–Love theories.

In the present work, we prove the existence of minimizers for the minimization problem of the total potential energy associated to the deformation of geometrically non-linear 6-parameter elastic shells. We wish to emphasize that our work is not concerned with the derivation of the 2D shell model, but it presents existence results for the well-established 2D theory of 6-parameter elastic shells. It should be mentioned from the beginning that this model refers to shells made of a simple (classical) elastic material, not a generalized (Cosserat or micropolar) continuum. However, the rotation tensor field appears naturally in this theory, in the course of the exact through-the-thickness reduction of the 3D formulation of the problem to the 2D one [14, 24, 32]. Thus, in spite of the above-mentioned similarity to the kinematics of Cosserat shells, the material of the shell in the resultant 6-parameter model is described as a simple continuum (without any specific microstructure or material length scale). On the other hand, in the case of dimensional reduction of the 3D equations of micropolar shell-like bodies one can obtain the same 6-parameter theory with modified 2D constitutive equations; see for example [3] for the linear case and [38, 42, 67] for the nonlinear case. One can also obtain more complex theories, as in [27].

For the proof of existence, we employ the direct methods of the calculus of variations and extend the techniques presented in [38, 42] to the case of general shells (with non-vanishing curvature in the reference configuration). In Section 2 we briefly present the kinematics of general 6-parameter shells and the equations of equilibrium. In Section 3 we give some alternative formulae for the strain tensor and curvature tensor, which are written in direct tensorial notation as well as in component (matrix) notation. These expressions are needed subsequently in the proof of our main result. In Section 4 we formulate the two-field minimization problem for general elastic shells, corresponding to mixed-type boundary conditions. Under the assumptions of convexity and coercivity of the quadratic strain energy function (physically linear material response), we prove the existence of minimizers over a large set of admissible pairs. Thus, the minimizing solution pair is of class $\mathbf{H}^1(\omega, \mathbb{R}^3)$ for the translation vector and $\mathbf{H}^1(\omega, SO(3))$ for the rotation tensor. The existence result is valid for general anisotropic elastic shells having a reference configuration with arbitrary geometry. Section 5 includes some applications of the existence theorem and discussions of special cases. We present a convenient way to choose the initial directors and the parametrization of the reference surface. Then, we consider the cases of isotropic shells, orthotropic shells, and composite layered shells separately and we present the respective forms of the strain energy densities. Applying the theorem stated previously, we establish the conditions on the constitutive coefficients that ensure the existence of minimizers in each situation. This analysis shows the usefulness of our theoretical result in the treatment of practical problems for elastic shells.

2. General 6-parameter resultant shells

Consider a general 6-parameter shell and denote the base surface of the shell in the reference (initial) configuration as S^0 and the base surface in the deformed configuration as S . Let O be a fixed point in the Euclidean space and $\{\mathbf{e}_1, \mathbf{e}_2, \mathbf{e}_3\}$ be the fixed orthonormal vector basis. The reference configuration is represented by the position vector \mathbf{y}^0 (relative to the point O) of the base surface S^0 plus the structure tensor \mathbf{Q}^0 . The structure tensor is a second-order proper orthogonal tensor which can be described by an orthonormal triad of directors $\{\mathbf{d}_1^0, \mathbf{d}_2^0, \mathbf{d}_3^0\}$ attached to every point [14, 24]. Thus the reference (initial) configuration is characterized by the functions

$$\begin{aligned} \mathbf{y}^0 : \omega \subset \mathbb{R}^2 &\rightarrow \mathbb{R}^3, & \mathbf{y}^0 &= \mathbf{y}^0(x_1, x_2), \\ \mathbf{Q}^0 : \omega \subset \mathbb{R}^2 &\rightarrow SO(3), & \mathbf{Q}^0 &= \mathbf{d}_i^0(x_1, x_2) \otimes \mathbf{e}_i, \end{aligned} \tag{1}$$

where (x_1, x_2) are material curvilinear coordinates on the surface S^0 . Throughout the paper Latin indexes i, j, \dots take the values $\{1, 2, 3\}$, while Greek indexes α, β, \dots take the values $\{1, 2\}$. The usual Einstein summation convention over repeated indexes is employed. We assume that the curvilinear coordinates $(x_1, x_2) \in \omega$ range over a bounded open domain ω (with Lipschitz boundary $\partial\omega$) of the Ox_1x_2 plane (see Figure 1). Let us denote the partial derivative with respect to x_α by $\partial_\alpha f = \partial f / \partial x_\alpha$, for any function f . We designate $\{\mathbf{a}_1, \mathbf{a}_2\}$ to be the (covariant) base vectors in the tangent plane of S^0 and \mathbf{n}^0 to be the unit normal to S^0 , given by

$$\mathbf{a}_\alpha = \partial_\alpha \mathbf{y}^0 = \frac{\partial \mathbf{y}^0}{\partial x_\alpha}, \quad \mathbf{n}^0 = \frac{\mathbf{a}_1 \times \mathbf{a}_2}{\|\mathbf{a}_1 \times \mathbf{a}_2\|}. \tag{2}$$

The reciprocal (contravariant) basis $\{\mathbf{a}^1, \mathbf{a}^2\}$ of the tangent plane is defined by $\mathbf{a}^\alpha \cdot \mathbf{a}_\beta = \delta_\beta^\alpha$ (the Kronecker symbol). We also use the notations

$$\mathbf{a}_3 = \mathbf{a}^3 = \mathbf{n}^0, \quad a_{\alpha\beta} = \mathbf{a}_\alpha \cdot \mathbf{a}_\beta, \quad a^{\alpha\beta} = \mathbf{a}^\alpha \cdot \mathbf{a}^\beta, \quad a = \sqrt{\det(a_{\alpha\beta})_{2 \times 2}} > 0.$$

For the deformed configuration of the shell, let $\mathbf{y}(x_1, x_2)$ denote the position vector (relative to O) and let $\{\mathbf{d}_i(x_1, x_2)\}$ be the orthonormal triad of directors attached to the point with initial curvilinear coordinates (x_1, x_2) . The deformed configuration is completely characterized by the functions

$$\mathbf{y} = \boldsymbol{\chi}(\mathbf{y}^0), \quad \mathbf{Q}^e = \mathbf{d}_i \otimes \mathbf{d}_i^0 \in SO(3), \tag{3}$$

where $\boldsymbol{\chi} : S^0 \rightarrow \mathbb{R}^3$ represents the deformation of the base surface, and the proper orthogonal tensor field \mathbf{Q}^e is the (effective) elastic rotation. The displacement vector is defined as usual by $\mathbf{u} = \mathbf{y} - \mathbf{y}^0$.

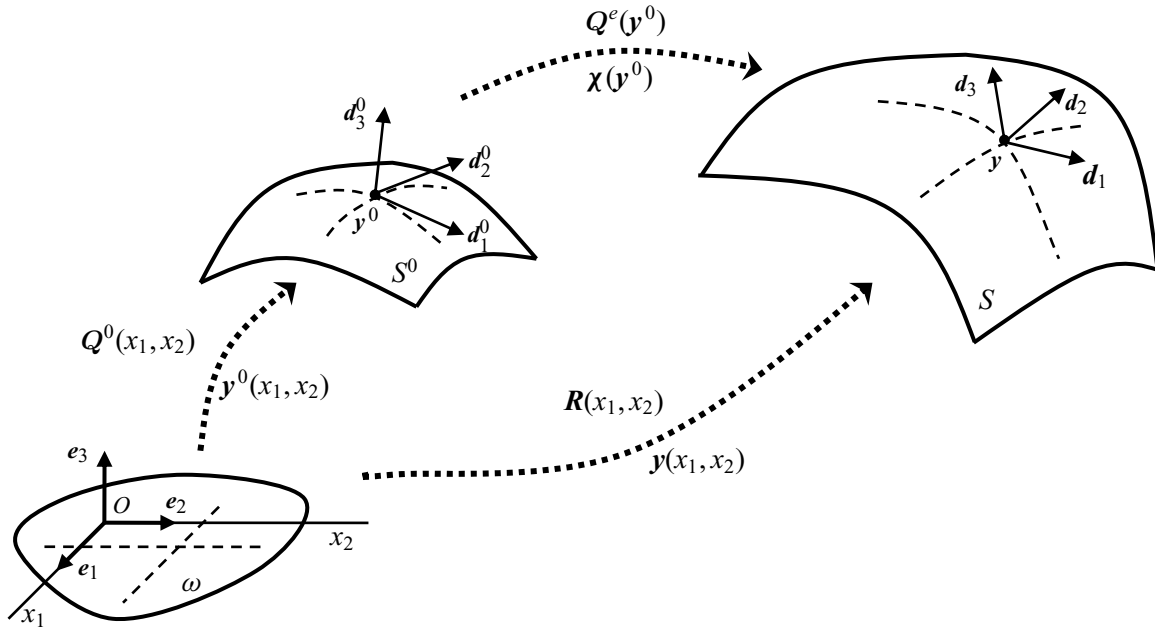


Figure 1. The base surface S^0 of the shell in the initial configuration, the base surface S in the deformed configuration, and the fictitious planar reference configuration ω . The orthonormal triads of vectors $\{e_i\}$, $\{d_i^0\}$ and $\{d_i\}$ are related through the relations $d_i = Q^e d_i^0 = R e_i$ and $d_i^0 = Q^0 e_i$, where Q^e is the elastic rotation field, Q^0 is the initial rotation, and R is the total rotation field.

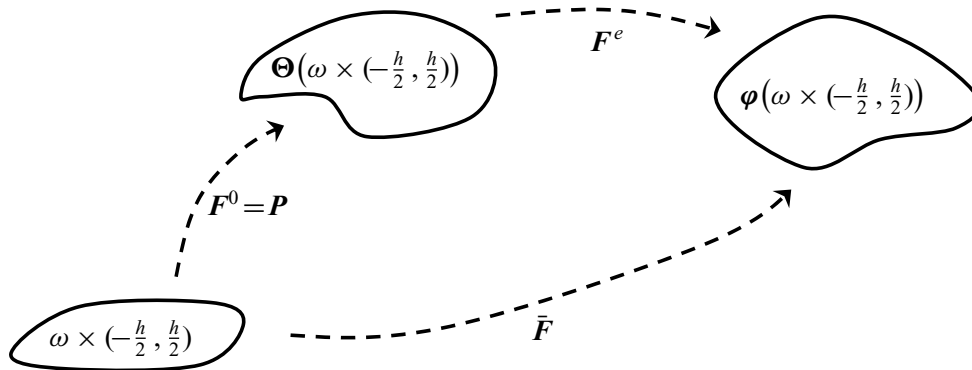


Figure 2. Multiplicative decomposition of the total deformation gradient $\bar{F} = F^e F^0$ into the elastic shell deformation gradient F^e and the initial deformation gradient $F^0 = P$. Interpretation is in terms of reconstructed three-dimensional quantities. The elastic response is governed by F^e . The curved initial configuration corresponds to the intermediate stress-free configuration in multiplicative plasticity.

The role of the triads of directors $\{d_i^0\}$ and $\{d_i\}$ is to determine the structure tensor Q^0 and the rotation tensor Q^e of the shell respectively. Thus, the directors do not describe here any microstructure of the material. According to the derivation procedure of the 6-parameter shell model, the kinematical fields y and Q^e are uniquely defined as the work-conjugate averages of 3D deformation distribution over the shell thickness, whose virtual values enter the virtual work principle of the shell (see [14, 33]).

In view of (1) and (3), the deformed configuration can alternatively be characterized by the functions

$$y = y(x_1, x_2) = \chi(y^0(x_1, x_2)), \quad R(x_1, x_2) = Q^e Q^0 = d_i(x_1, x_2) \otimes e_i \in SO(3),$$

where the vector y and the orthogonal tensor R are fields defined over ω . The orthogonal tensor field Q^e represents the *elastic rotation* tensor between the reference and deformed configurations [52, 53]. The tensor Q^0 is the *initial rotation* field, while $R = Q^e Q^0$ describes the *total rotation* from the fictitious planar reference

configuration ω (endowed with the triad $\{e_i\}$) to the deformed configuration S . The tensors Q^0 and R are also called the *structure tensors* of the reference and deformed configurations respectively [14, 24]. The following relations hold

$$Q^e = RQ^{0,T}, \quad d_i^0 = Q^0 e_i, \quad d_i = Q^e d_i^0 = R e_i. \quad (4)$$

Usually, the initial directors d_i^0 are chosen such that $d_3^0 = n^0$ and d_α^0 belong to the tangent plane of S^0 (see Remark 10). This assumption is not necessary in general and we do not use it in the proof of our existence result.

Let $F = \text{Grad}_s y = \partial_\alpha y \otimes a^\alpha$ denote the (total) shell deformation gradient tensor. The strong form of the equations of equilibrium for 6-parameter shells can be written in the form [24]

$$\text{Div}_s N + f = 0, \quad \text{Div}_s M + \text{axl}(NF^T - FN^T) + c = 0, \quad (5)$$

where N and M are the internal surface stress resultant and stress couple tensors of the first Piola–Kirchhoff type, while f and c are the external surface resultant force and couple vectors applied to points of S , but measured per unit area of S^0 . The operators Grad_s and Div_s are the surface gradient and surface divergence respectively, defined intrinsically in [29, 34]. The superscript $(\cdot)^T$ denotes the transpose and $\text{axl}(\cdot)$ represents the axial vector of a skew-symmetric tensor.

Let ν be the external unit normal vector to the boundary curve ∂S^0 lying in the tangent plane. We consider boundary conditions of the type [23, 51]

$$\begin{aligned} N\nu &= n^*, & M\nu &= m^* & \text{along } \partial S_f^0, \\ y &= y^*, & R &= R^* & \text{along } \partial S_d^0, \end{aligned} \quad (6)$$

where $\partial S^0 = \partial S_f^0 \cup \partial S_d^0$ is a disjoint partition of S^0 ($\partial S_f^0 \cap \partial S_d^0 = \emptyset$) with length $(\partial S_d^0) > 0$. Here, n^* and m^* are the external boundary resultant force and couple vectors respectively, applied along the deformed boundary ∂S , but measured per unit length of $\partial S_f^0 \subset \partial S^0$. We denote by $\partial\omega_f$ and $\partial\omega_d$ the subsets of the boundary curve $\partial\omega$ which correspond to ∂S_f^0 and ∂S_d^0 respectively, through the mapping y^0 .

The weak form associated to these local balance equations for shells has been presented in [14, 23, 32].

3. Elastic shell strain and curvature measures

According to [14, 24], the elastic shell strain tensor E^e in the material representation is given by

$$E^e = Q^{e,T} \text{Grad}_s y - \text{Grad}_s y^0 = (Q^{e,T} \partial_\alpha y - \partial_\alpha y^0) \otimes a^\alpha, \quad (7)$$

since $\text{Grad}_s y = \partial_\alpha y \otimes a^\alpha$. It is useful to write the strain tensor E^e in the alternative form

$$\begin{aligned} E^e &= (Q^{e,T} \partial_\alpha y - a_\alpha) \otimes a^\alpha = (Q^{e,T} \partial_\alpha y \otimes a^\alpha + n^0 \otimes a^3) - (a_i \otimes a^i) \\ &= (Q^{e,T} \partial_\alpha y \otimes e_\alpha + n^0 \otimes e_3)(e_i \otimes a^i) - \mathbb{1}_3, \end{aligned}$$

or equivalently, since $(e_i \otimes a^i) = (a_i \otimes e_i)^{-1}$,

$$\begin{aligned} E^e &= (Q^{e,T} \partial_\alpha y \otimes e_\alpha + n^0 \otimes e_3)(a_i \otimes e_i)^{-1} - \mathbb{1}_3 = \bar{U}^e - \mathbb{1}_3, \\ \text{with } \bar{U}^e &= (Q^{e,T} \partial_\alpha y \otimes e_\alpha + n^0 \otimes e_3)(a_i \otimes e_i)^{-1}, \end{aligned} \quad (8)$$

where $\mathbb{1}_3 = e_i \otimes e_i$ is the identity tensor and \bar{U}^e represents the non-symmetric *elastic shell stretch tensor*, which can be seen as the 2D analog of the 3D non-symmetric Biot-type stretch tensor [44] or the first Cosserat deformation tensor [20, p. 123, eq. (43)] for the shell. Let us denote by P the tensor defined by

$$P = a_i \otimes e_i = \partial_\alpha y^0 \otimes e_\alpha + n^0 \otimes e_3. \quad (9)$$

Then, from (8) and (9) we get

$$\begin{aligned} E^e &= \bar{U}^e - \mathbb{1}_3 = Q^{e,T} (\partial_\alpha y \otimes e_\alpha + Q^e n^0 \otimes e_3) P^{-1} - \mathbb{1}_3, \\ \bar{U}^e &= Q^{e,T} (\partial_\alpha y \otimes e_\alpha + Q^e n^0 \otimes e_3) P^{-1}. \end{aligned} \quad (10)$$

In the sequel, it is useful to write the elastic shell strain tensors in component form, relative to the fixed tensor basis $\{e_i \otimes e_j\}$. Let $E^e = (E_{ij}^e)_{3 \times 3}$ be the matrix of components for the tensor $E^e = E_{ij}^e e_i \otimes e_j$. In general, we decompose any second-order tensor T in the form $T = T_{ij} e_i \otimes e_j$ and denote the matrix of components by $T = (T_{ij})_{3 \times 3}$. Also, for any vector $v = v_i e_i$ we denote the column matrix of components by $v = (v_i)_{3 \times 1}$.

Remark 1 The matrix of components $P = (P_{ij})_{3 \times 3}$ for the tensor defined in (9) can be specified in terms of its three column vectors as follows

$$P = \left(\partial_1 y^0 \mid \partial_2 y^0 \mid n^0 \right)_{3 \times 3} = \left(\nabla y^0 \mid n^0 \right)_{3 \times 3} = \left(a_1 \mid a_2 \mid n^0 \right)_{3 \times 3}. \quad (11)$$

The tensor P introduced in equation (9) can be seen as a 3D (deformation) gradient

$$\begin{aligned} P &= \nabla \Theta(x_1, x_2, x_3) \Big|_{x_3=0}, \quad \text{with} \\ \Theta(x_1, x_2, x_3) &:= y^0(x_1, x_2) + x_3 n^0(x_1, x_2), \end{aligned} \quad (12)$$

and it satisfies $\det P = \sqrt{\det a_{\alpha\beta}} = a > 0$, such that the inverse P^{-1} exists. The mapping $\Theta : \omega \times \left(-\frac{h}{2}, \frac{h}{2}\right) \rightarrow \mathbb{R}^3$ has been introduced previously in [18, 19, 38], and employed for the geometrical description of 3D shells (h denotes the thickness of the shell).

By virtue of equations (8) and (9), we obtain the following matrix form for the strain tensor E^e

$$E^e = \left(Q^{e,T} \partial_1 y \mid Q^{e,T} \partial_2 y \mid n^0 \right) P^{-1} - \mathbb{1}_3, \quad (13)$$

where $\mathbb{1}_3 = (\delta_{ij})_{3 \times 3}$ is the unit matrix. Equivalently, the matrix E^e can be written as

$$\begin{aligned} E^e &= Q^{e,T} \left(\partial_1 y \mid \partial_2 y \mid Q^e n^0 \right) P^{-1} - \mathbb{1}_3, \quad \text{or} \\ E^e &= \bar{U}^e - \mathbb{1}_3 = Q^{e,T} F^e - \mathbb{1}_3 = Q^{e,T} \bar{F} P^{-1} - \mathbb{1}_3, \end{aligned} \quad (14)$$

with

$$\begin{aligned} \bar{U}^e &= Q^{e,T} \left(\partial_1 y \mid \partial_2 y \mid Q^e n^0 \right) P^{-1} = Q^{e,T} \left(\nabla y \mid Q^e n^0 \right) P^{-1}, \\ F^e &:= \left(\partial_1 y \mid \partial_2 y \mid Q^e n^0 \right) P^{-1} = \left(\nabla y \mid Q^e n^0 \right) (\nabla \Theta(x_1, x_2, 0))^{-1}, \\ \bar{F} &:= \left(\partial_1 y \mid \partial_2 y \mid Q^e n^0 \right) = \left(\nabla y \mid Q^e n^0 \right), \\ F^0 &:= P = \left(\partial_1 y^0 \mid \partial_2 y^0 \mid n^0 \right) = \left(\nabla y^0 \mid n^0 \right), \\ \bar{F} &= F^e F^0. \end{aligned} \quad (15)$$

In order to see a parallel with the classical multiplicative decomposition into elastic and plastic parts from finite elasto-plasticity [37, 40], we may interpret F^e as an elastic shell mid-surface deformation gradient and $F^0 = P$ as an initial deformation gradient. Both are gradients of suitably defined mappings (see Remark 2 and Figure 2), in contrast to the case of elasto-plasticity. In our context, the elastic material response is defined in terms of the elastic part of the deformation, for example $E^e = Q^{e,T} F^e - \mathbb{1}_3$ (cf. (14)).

Remark 2 Although the resultant shell model is truly a 2D theory, we may always consider artificially reconstructed 3D quantities. In this sense, similarly to the context of Remark 1, the tensor $\bar{\mathbf{F}} = \partial_\alpha \mathbf{y} \otimes \mathbf{e}_\alpha + \mathbf{Q}^e \mathbf{n}^0 \otimes \mathbf{e}_3$, which has the matrix of components \bar{F} , is a 3D deformation gradient

$$\begin{aligned} \bar{\mathbf{F}} &= \nabla \boldsymbol{\varphi}(x_1, x_2, x_3) \Big|_{x_3=0}, \quad \text{with} \\ \boldsymbol{\varphi}(x_1, x_2, x_3) &:= \mathbf{y}(x_1, x_2) + x_3 \mathbf{Q}^e(x_1, x_2) \mathbf{n}^0(x_1, x_2) \\ &= \mathbf{y}(x_1, x_2) + x_3 \mathbf{Q}^e(x_1, x_2) \nabla \boldsymbol{\Theta}(x_1, x_2, 0) \mathbf{e}_3. \end{aligned} \tag{16}$$

Here, the mapping $\boldsymbol{\varphi} : \omega \times (-\frac{h}{2}, \frac{h}{2}) \rightarrow \mathbb{R}^3$ is a 3D deformation of the body, in terms of the given 2D quantities $\mathbf{y}(x_1, x_2)$ and $\mathbf{Q}^e(x_1, x_2)$. Similarly,

$$\begin{aligned} \mathbf{F}^e &:= \nabla \boldsymbol{\varphi}^e \left(\boldsymbol{\Theta}(x_1, x_2, x_3) \Big|_{x_3=0} \right), \quad \text{with} \\ \boldsymbol{\varphi}^e \left(\boldsymbol{\Theta}(x_1, x_2, x_3) \right) &:= \boldsymbol{\varphi}(x_1, x_2, x_3). \end{aligned}$$

However, we note that $\bar{\mathbf{F}}$ cannot be interpreted as the 3D deformation gradient of the real 3D shell, because in general the initial normals become arbitrarily curved after deformation.

In terms of the total rotation \mathbf{R} and the initial rotation \mathbf{Q}^0 , the elastic shell strain tensor is expressed by

$$\mathbf{E}^e = \mathbf{Q}^0 (\mathbf{R}^T \partial_\alpha \mathbf{y} - \mathbf{Q}^{0,T} \partial_\alpha \mathbf{y}^0) \otimes \mathbf{a}^\alpha. \tag{17}$$

Then, we have

$$\mathbf{E}^e = \mathbf{Q}^0 [(\mathbf{R}^T \partial_\alpha \mathbf{y} - \mathbf{Q}^{0,T} \partial_\alpha \mathbf{y}^0) \otimes \mathbf{e}_\alpha] (\mathbf{e}_i \otimes \mathbf{a}^i) = \mathbf{Q}^0 [(\mathbf{R}^T \partial_\alpha \mathbf{y} - \mathbf{Q}^{0,T} \partial_\alpha \mathbf{y}^0) \otimes \mathbf{e}_\alpha] \mathbf{P}^{-1}$$

which can be written in matrix form as follows

$$\mathbf{E}^e = \mathbf{Q}^0 \mathbf{H} \mathbf{P}^{-1} \quad \text{with} \quad \mathbf{H} := \left(R^T \partial_{1y} - Q^{0,T} \partial_{1y}^0 \mid R^T \partial_{2y} - Q^{0,T} \partial_{2y}^0 \mid 0 \right)_{3 \times 3}. \tag{18}$$

On the other hand, the elastic shell curvature tensor \mathbf{K}^e in the material description is defined by [14, 24]

$$\mathbf{K}^e = [\mathbf{Q}^{e,T} \text{axl}(\partial_\alpha \mathbf{R} \mathbf{R}^T) - \text{axl}(\partial_\alpha \mathbf{Q}^0 \mathbf{Q}^{0,T})] \otimes \mathbf{a}^\alpha. \tag{19}$$

In order to write \mathbf{K}^e in a form more convenient to us, we use relations of the type

$$\tilde{\mathbf{Q}}^T \text{axl}(\partial_\alpha \tilde{\mathbf{Q}} \tilde{\mathbf{Q}}^T) = \text{axl}(\tilde{\mathbf{Q}}^T \partial_\alpha \tilde{\mathbf{Q}}), \quad \text{axl}(\tilde{\mathbf{Q}} \mathbf{A} \tilde{\mathbf{Q}}^T) = \tilde{\mathbf{Q}} \text{axl}(\mathbf{A}), \tag{20}$$

which hold true for any orthogonal tensor $\tilde{\mathbf{Q}} \in SO(3)$ and any skew-symmetric tensor $\mathbf{A} \in \mathfrak{so}(3)$ (see e.g. [12]). Using (20) in (19) we can write the elastic curvature tensor \mathbf{K}^e in the equivalent forms

$$\mathbf{K}^e = \mathbf{Q}^{e,T} \text{axl}(\partial_\alpha \mathbf{Q}^e \mathbf{Q}^{e,T}) \otimes \mathbf{a}^\alpha = \text{axl}(\mathbf{Q}^{e,T} \partial_\alpha \mathbf{Q}^e) \otimes \mathbf{a}^\alpha, \tag{21}$$

or

$$\mathbf{K}^e = [\text{axl}(\mathbf{Q}^{e,T} \partial_\alpha \mathbf{Q}^e) \otimes \mathbf{e}_\alpha] (\mathbf{a}_i \otimes \mathbf{e}_i)^{-1} = [\text{axl}(\mathbf{Q}^{e,T} \partial_\alpha \mathbf{Q}^e) \otimes \mathbf{e}_\alpha] \mathbf{P}^{-1}.$$

Then, the matrix of components $K^e = (K_{ij}^e)_{3 \times 3}$ is given by

$$\mathbf{K}^e = \left(\text{axl}(\mathbf{Q}^{e,T} \partial_1 \mathbf{Q}^e) \mid \text{axl}(\mathbf{Q}^{e,T} \partial_2 \mathbf{Q}^e) \mid 0 \right) \mathbf{P}^{-1}. \tag{22}$$

If we express \mathbf{K}^e in terms of the total rotation \mathbf{R} and the initial rotation \mathbf{Q}^0 , we get

$$\mathbf{K}^e = \mathbf{Q}^0 [\text{axl}(\mathbf{R}^T \partial_\alpha \mathbf{R}) - \text{axl}(\mathbf{Q}^{0,T} \partial_\alpha \mathbf{Q}^0)] \otimes \mathbf{a}^\alpha. \tag{23}$$

This relation can be written as

$$\begin{aligned} \mathbf{K}^e &= \mathbf{K} - \mathbf{K}^0, & \text{with} & \quad \mathbf{K} := \mathbf{Q}^0 \text{axl}(\mathbf{R}^T \partial_\alpha \mathbf{R}) \otimes \mathbf{a}^\alpha, \\ \mathbf{K}^0 &:= \mathbf{Q}^0 \text{axl}(\mathbf{Q}^{0,T} \partial_\alpha \mathbf{Q}^0) \otimes \mathbf{a}^\alpha = \text{axl}(\partial_\alpha \mathbf{Q}^0 \mathbf{Q}^{0,T}) \otimes \mathbf{a}^\alpha, \end{aligned} \quad (24)$$

where the tensor \mathbf{K} is the total curvature tensor, while \mathbf{K}^0 is the initial curvature (or structure curvature tensor of S^0). In view of (23) and (24), the matrix $K^e = (K_{ij}^e)$ is given by

$$\begin{aligned} K^e &= \mathbf{Q}^0 L P^{-1} = K - K^0 & \text{with} \\ L &:= \left(\begin{array}{c|c|c} \text{axl}(\mathbf{R}^T \partial_1 \mathbf{R}) - \text{axl}(\mathbf{Q}^{0,T} \partial_1 \mathbf{Q}^0) & \text{axl}(\mathbf{R}^T \partial_2 \mathbf{R}) - \text{axl}(\mathbf{Q}^{0,T} \partial_2 \mathbf{Q}^0) & 0 \end{array} \right)_{3 \times 3}, \\ K &= \mathbf{Q}^0 \left(\begin{array}{c|c|c} \text{axl}(\mathbf{R}^T \partial_1 \mathbf{R}) & \text{axl}(\mathbf{R}^T \partial_2 \mathbf{R}) & 0 \end{array} \right) P^{-1}, \\ K^0 &= \mathbf{Q}^0 \left(\begin{array}{c|c|c} \text{axl}(\mathbf{Q}^{0,T} \partial_1 \mathbf{Q}^0) & \text{axl}(\mathbf{Q}^{0,T} \partial_2 \mathbf{Q}^0) & 0 \end{array} \right) P^{-1}. \end{aligned} \quad (25)$$

In what follows, we shall use the expressions (18) and (25) of the elastic shell strain measures \mathbf{E}^e and \mathbf{K}^e written with tensor components in the basis $\{\mathbf{e}_i \otimes \mathbf{e}_j\}$.

Remark 3 As expected, the case of zero strain and bending measures corresponds to a rigid body mode of the shell. Indeed, if $\mathbf{E}^e = \mathbf{0}$ and $\mathbf{K}^e = \mathbf{0}$, then from (7) and (21) we obtain

$$\partial_\alpha \mathbf{y} = \mathbf{Q}^e \partial_\alpha \mathbf{y}^0 \quad \text{and} \quad \partial_\alpha \mathbf{Q}^e = \mathbf{0}.$$

Hence, it follows that \mathbf{Q}^e is constant and

$$\mathbf{y} = \mathbf{Q}^e \mathbf{y}^0 + \mathbf{c} \quad (\mathbf{c} = \text{constant}),$$

which means that the shell undergoes a rigid body motion with constant translation \mathbf{c} and constant rotation \mathbf{Q}^e .

Remark 4 In the case where the base surface S^0 of the initial configuration of the shell is planar we may assume that S^0 coincides with ω . In this situation we have $\mathbf{a}_i = \mathbf{e}_i$, $\mathbf{P} = \mathbb{1}_3$, and the above strain and curvature measures coincide with those defined for the Cosserat model of planar shells introduced in [38, 42].

Remark 5 In view of (21) and (22), the elastic shell curvature tensor \mathbf{K}^e is an analog of the second Cosserat deformation tensor in the 3D theory: see the original Cosserat book [20, p. 123, eq. (44)].

4. Variational formulation for elastic shells

Let us denote the strain energy density of the elastic shell by $W = W(\mathbf{E}^e, \mathbf{K}^e)$. According to the hyperelasticity assumption, the internal surface stress resultant \mathbf{N} and stress couple tensor \mathbf{M} are expressed by the constitutive equations in the form

$$\mathbf{N} = \mathbf{Q}^e \frac{\partial W}{\partial \mathbf{E}^e}, \quad \mathbf{M} = \mathbf{Q}^e \frac{\partial W}{\partial \mathbf{K}^e}. \quad (26)$$

In this paper we assume that the strain energy density W is a quadratic function of its arguments \mathbf{E}^e and \mathbf{K}^e . Thus, the considered model is physically linear and geometrically non-linear. The explicit form of the strain energy function W is presented in [24, 32] for isotropic, hemitropic or orthotropic elastic shells. In general, the coefficients of the strain energy function W depend on the structure curvature tensor \mathbf{K}^0 (see [24]). In [13], the case of composite (layered) shells is investigated and the expression of the energy density is established. These special cases will be discussed in Section 5.

Consider the usual Lebesgue spaces $(L^p(\omega), \|\cdot\|_{L^p(\omega)})$, $p \geq 1$, and Sobolev space $(H^1(\omega), \|\cdot\|_{H^1(\omega)})$. We denote by $L^p(\omega, \mathbb{R}^3)$ (and respectively $H^1(\omega, \mathbb{R}^3)$) the space of all vector fields $\mathbf{v} = v_i \mathbf{e}_i$ such that $v_i \in L^p(\omega)$ (and respectively $v_i \in H^1(\omega)$). Similarly, we denote the following sets

$$H^1(\omega, \mathbb{R}^{3 \times 3}) = \{\mathbf{T} = T_{ij} \mathbf{e}_i \otimes \mathbf{e}_j \mid T_{ij} \in H^1(\omega)\},$$

$$\begin{aligned} H^1(\omega, SO(3)) &= \{T \in H^1(\omega, \mathbb{R}^{3 \times 3}) \mid T \in SO(3)\}, \\ L^p(\omega, \mathbb{R}^{3 \times 3}) &= \{T = T_{ij}e_i \otimes e_j \mid T_{ij} \in L^p(\omega)\}, \\ L^p(\omega, SO(3)) &= \{T \in L^p(\omega, \mathbb{R}^{3 \times 3}) \mid T \in SO(3)\}. \end{aligned}$$

The norm of a tensor T is defined by $\|T\|^2 = \text{tr}(TT^T) = T_{ij}T_{ij}$.

Concerning the boundary-value problem of (5) and (6), we assume the existence of a function $\Lambda(\mathbf{y}, \mathbf{R})$ representing the potential of external surface loads \mathbf{f} , \mathbf{c} , and boundary loads \mathbf{n}^* , \mathbf{m}^* (cf. [23]).

We consider the following two-field minimization problem associated to the deformation of elastic shells: find the pair $(\hat{\mathbf{y}}, \hat{\mathbf{R}})$ in the admissible set \mathcal{A} which realizes the minimum of the functional

$$I(\mathbf{y}, \mathbf{R}) = \int_{S^0} W(\mathbf{E}^e, \mathbf{K}^e) \, dS - \Lambda(\mathbf{y}, \mathbf{R}) \quad \text{for } (\mathbf{y}, \mathbf{R}) \in \mathcal{A}, \tag{27}$$

where dS is the area element of the surface S^0 . The admissible set \mathcal{A} is defined by

$$\mathcal{A} = \{(\mathbf{y}, \mathbf{R}) \in H^1(\omega, \mathbb{R}^3) \times H^1(\omega, SO(3)) \mid \mathbf{y}|_{\partial S^0_d} = \mathbf{y}^*, \mathbf{R}|_{\partial S^0_d} = \mathbf{R}^*\}, \tag{28}$$

where the boundary conditions are to be understood in the sense of traces. The tensors \mathbf{E}^e and \mathbf{K}^e are expressed in terms of (\mathbf{y}, \mathbf{R}) through the relations (17) and (23). If we write $W = W(\mathbf{E}^e, \mathbf{K}^e) = \tilde{W}(\nabla \mathbf{y}, \mathbf{R}, \nabla \mathbf{R})$, then, referring the integral to the (fictitious reference) domain ω , the change-of-variable formula clearly gives

$$\begin{aligned} \int_{S^0} W(\mathbf{E}^e, \mathbf{K}^e) \, dS &= \int_{\omega} W(\mathbf{E}^e, \mathbf{K}^e) a(x_1, x_2) \, dx_1 dx_2 \\ &= \int_{\omega} \tilde{W}(\nabla \mathbf{y}(x_1, x_2), \mathbf{R}(x_1, x_2), \nabla \mathbf{R}(x_1, x_2)) \det(\nabla \Theta(x_1, x_2, 0)) \, dx_1 dx_2, \end{aligned} \tag{29}$$

where $a = \sqrt{\det(a_{\alpha\beta})}$ is the notation introduced previously. The variational principle for the total energy of elastic shells with respect to the functional (27) has been presented in [23, Section 2]. We decompose the loading potential $\Lambda(\mathbf{y}, \mathbf{R})$ additively as follows

$$\begin{aligned} \Lambda(\mathbf{y}, \mathbf{R}) &= \Lambda_{S^0}(\mathbf{y}, \mathbf{R}) + \Lambda_{\partial S^0_f}(\mathbf{y}, \mathbf{R}), \\ \Lambda_{S^0}(\mathbf{y}, \mathbf{R}) &= \int_{S^0} \mathbf{f} \cdot \mathbf{u} \, dS + \Pi_{S^0}(\mathbf{R}), \quad \Lambda_{\partial S^0_f}(\mathbf{y}, \mathbf{R}) = \int_{\partial S^0_f} \mathbf{n}^* \cdot \mathbf{u} \, dl + \Pi_{\partial S^0_f}(\mathbf{R}), \end{aligned} \tag{30}$$

where $\mathbf{u} = \mathbf{y} - \mathbf{y}^0$ is the displacement vector and dl is the element of length along the boundary curve ∂S^0_f . In (30), $\Lambda_{S^0}(\mathbf{y}, \mathbf{R})$ is the potential of the external surface loads \mathbf{f} , \mathbf{c} , while $\Lambda_{\partial S^0_f}(\mathbf{y}, \mathbf{R})$ is the potential of the external boundary loads \mathbf{n}^* , \mathbf{m}^* . The expressions of the load potential functions $\Pi_{S^0}, \Pi_{\partial S^0_f} : L^2(\omega, SO(3)) \rightarrow \mathbb{R}$ are not given explicitly, but they are assumed to be continuous and bounded operators. Of course, the integrals over S^0 and ∂S^0_f appearing in (30) can be transformed as in (29) into integrals over ω and $\partial \omega_f$, respectively.

One can consider more general cases of external loads in the definition of the loading potential (30), such as for example tracking loads.

4.1. Main result: Existence of minimizers

This theorem states the existence of minimizers to the minimization problem (27)–(30).

Theorem 6 Assume that the external loads satisfy the conditions

$$\mathbf{f} \in L^2(\omega, \mathbb{R}^3), \quad \mathbf{n}^* \in L^2(\partial \omega_f, \mathbb{R}^3), \tag{31}$$

and the boundary data satisfy the conditions

$$\mathbf{y}^* \in H^1(\omega, \mathbb{R}^3), \quad \mathbf{R}^* \in H^1(\omega, SO(3)). \tag{32}$$

Assume that the following conditions concerning the initial configuration are fulfilled: $\mathbf{y}^0 : \omega \subset \mathbb{R}^2 \rightarrow \mathbb{R}^3$ is a continuous injective mapping and

$$\mathbf{y}^0 \in \mathbf{H}^1(\omega, \mathbb{R}^3), \quad \mathbf{Q}^0 \in \mathbf{H}^1(\omega, SO(3)), \quad (33)$$

$$\begin{aligned} \mathbf{a}_\alpha &= \partial_\alpha \mathbf{y}^0 \in \mathbf{L}^\infty(\omega, \mathbb{R}^3) \quad (\text{i.e. } \nabla \mathbf{y}^0 \in \mathbf{L}^\infty(\omega, \mathbb{R}^{3 \times 2})), \\ \det(a_{\alpha\beta}(x_1, x_2)) &\geq a_0^2 > 0, \end{aligned} \quad (34)$$

where a_0 is a constant. The strain energy density $W(\mathbf{E}^e, \mathbf{K}^e)$ is assumed to be a quadratic convex function of $(\mathbf{E}^e, \mathbf{K}^e)$ and W is coercive, in the sense that there exists a constant $C_0 > 0$ with

$$W(\mathbf{E}^e, \mathbf{K}^e) \geq C_0 (\|\mathbf{E}^e\|^2 + \|\mathbf{K}^e\|^2). \quad (35)$$

Then, the minimization problem (27)–(30) admits at least one minimizing solution pair $(\hat{\mathbf{y}}, \hat{\mathbf{R}}) \in \mathcal{A}$.

Remark 7 The hypotheses (34) can be written equivalently in terms of the tensor $\mathbf{P} = \nabla \Theta(x_1, x_2, 0)$ as

$$\mathbf{P} \in \mathbf{L}^\infty(\omega, \mathbb{R}^{3 \times 3}), \quad \det \mathbf{P} \geq a_0 > 0, \quad (36)$$

in view of the relations (9) and (11). Since \mathbf{y}^0 represents the position vector of the reference base surface S^0 (which is bounded), the conditions (33)₁ and (34)₁ can be written together in the form $\mathbf{y}^0 \in \mathbf{W}^{1,\infty}(\omega, \mathbb{R}^3)$.

Proof. We employ the direct methods of the calculus of variations. We show first that there exists a constant $C > 0$ such that

$$|\Lambda(\mathbf{y}, \mathbf{R})| \leq C (\|\mathbf{y}\|_{H^1(\omega)} + 1), \quad \forall (\mathbf{y}, \mathbf{R}) \in \mathcal{A}. \quad (37)$$

Indeed, since $\mathbf{a}_\alpha \in \mathbf{L}^\infty(\omega, \mathbb{R}^3)$ it follows that $a = \sqrt{\det(a_{\alpha\beta})} \in L^\infty(\omega)$. We also have $\|\mathbf{R}\|^2 = \text{tr}(\mathbf{R}\mathbf{R}^T) = 3$, $\forall \mathbf{R} \in SO(3)$. Taking into account the hypotheses (31) and the boundedness of Π_{S^0} and $\Pi_{\partial S_f^0}$, we deduce from (30) that

$$\begin{aligned} |\Lambda(\mathbf{y}, \mathbf{R})| &\leq |\Lambda_{S^0}(\mathbf{y}, \mathbf{R})| + |\Lambda_{\partial S_f^0}(\mathbf{y}, \mathbf{R})| \leq C_1 \|\mathbf{y} - \mathbf{y}^0\|_{L^2(\omega)} + C_2 \|\mathbf{y} - \mathbf{y}^0\|_{L^2(\partial\omega_f)} \\ &+ |\Pi_{S^0}(\mathbf{R})| + |\Pi_{\partial S_f^0}(\mathbf{R})| \leq C_3 \|\mathbf{y}\|_{L^2(\omega)} + C_4 \|\mathbf{y}\|_{H^1(\omega)} + C_5, \end{aligned}$$

for some positive constants $C_k > 0$. Then, the inequality (37) holds.

In what follows, we employ the component form of the elastic strain tensors \mathbf{E}^e and \mathbf{K}^e , written as matrices E^e and K^e in (18) and (25), respectively. Let us show next that there exists a positive constant $\lambda_0 > 0$ such that

$$\|\mathbf{E}^e\| = \|E^e\| \geq \lambda_0 \|H\|, \quad \|\mathbf{K}^e\| = \|K^e\| \geq \lambda_0 \|L\|, \quad (38)$$

where the matrices $H = (H_{ij})_{3 \times 3}$ and $L = (L_{ij})_{3 \times 3}$ are introduced in (18) and (25). Indeed, since $E^e = Q^0 H P^{-1}$ and $Q^0 \in SO(3)$ we have

$$\|E^e\|^2 = \|Q^0 H P^{-1}\|^2 = \|H P^{-1}\|^2 = \text{tr}[H P^{-1} (H P^{-1})^T] = \text{tr}[H (P^T P)^{-1} H^T]. \quad (39)$$

From (11) we deduce that

$$P^T P = \begin{bmatrix} a_{11} & a_{12} & 0 \\ a_{12} & a_{22} & 0 \\ 0 & 0 & 1 \end{bmatrix} \quad \text{and therefore} \quad (P^T P)^{-1} = \begin{bmatrix} a^{11} & a^{12} & 0 \\ a^{12} & a^{22} & 0 \\ 0 & 0 & 1 \end{bmatrix}. \quad (40)$$

Inserting (40) into (39) we obtain

$$\|E^e\|^2 = a^{\alpha\beta} H_{i\alpha} H_{i\beta} = a^{\alpha\beta} H_{1\alpha} H_{1\beta} + a^{\alpha\beta} H_{2\alpha} H_{2\beta} + a^{\alpha\beta} H_{3\alpha} H_{3\beta}, \quad \text{with } H = (H_{ij})_{3 \times 3}, \quad (41)$$

since $H_{i3} = 0$ according to (18). By virtue of (34), it follows that the matrix $(a_{\alpha\beta})_{2 \times 2}$ and its inverse matrix $(a^{\alpha\beta})_{2 \times 2} = (a_{\alpha\beta})^{-1}$ satisfy

$$(a_{\alpha\beta}) \in L^\infty(\omega, \mathbb{R}^{2 \times 2}) \quad \text{and} \quad (a^{\alpha\beta}) \in L^\infty(\omega, \mathbb{R}^{2 \times 2}).$$

Then, the smallest eigenvalue of the positive definite symmetric matrix $(a^{\alpha\beta}(x_1, x_2))_{2 \times 2}$ is greater than a positive constant $\lambda_0^2 > 0$ and consequently

$$a^{\alpha\beta}(x_1, x_2) v_\alpha v_\beta \geq \lambda_0^2 v_\gamma v_\gamma, \quad \forall (x_1, x_2) \in \omega, \quad \forall v_1, v_2 \in \mathbb{R}. \tag{42}$$

Using inequality (42) for each individual sum in the right-hand side of equation (41) we deduce that $\|E^e\|^2 \geq \lambda_0^2 H_{i\alpha} H_{i\alpha} = \lambda_0^2 \|H\|^2$, in other words, the inequality (38)₁ is proved. The proof of inequality (38)₂ is identical. In view of (18) and (38)₁ we have

$$\begin{aligned} \|E^e\|^2 &\geq \lambda_0^2 \sum_{\alpha=1}^2 \|R^T \partial_\alpha y - Q^{0,T} \partial_\alpha y^0\|^2 \\ &= \lambda_0^2 \sum_{\alpha=1}^2 (\|R^T \partial_\alpha y\|^2 - 2 \langle R^T \partial_\alpha y, Q^{0,T} \partial_\alpha y^0 \rangle + \|Q^{0,T} \partial_\alpha y^0\|^2) \\ &= \lambda_0^2 \sum_{\alpha=1}^2 (\|\partial_\alpha y\|^2 - 2 \langle R^T \partial_\alpha y, Q^{0,T} \partial_\alpha y^0 \rangle + \|\partial_\alpha y^0\|^2), \end{aligned}$$

where $\langle S, T \rangle = \text{tr}[ST^T]$ is the scalar product of two matrices S, T . Integrating over ω and using the Cauchy–Schwarz inequality we obtain

$$\|E^e\|_{L^2(\omega)}^2 \geq \lambda_0^2 \sum_{\alpha=1}^2 (\|\partial_\alpha y\|_{L^2(\omega)}^2 - 2 \|\partial_\alpha y\|_{L^2(\omega)} \|\partial_\alpha y^0\|_{L^2(\omega)} + \|\partial_\alpha y^0\|_{L^2(\omega)}^2),$$

or

$$\|E^e\|_{L^2(\omega)}^2 \geq \lambda_0^2 (\|\partial_1 y\|_{L^2(\omega)}^2 + \|\partial_2 y\|_{L^2(\omega)}^2) - \bar{C}_1 \|y\|_{H^1(\omega)} + \bar{C}_2, \tag{43}$$

for some positive constants $\bar{C}_1 > 0, \bar{C}_2 > 0$. Let us show that the functional $I(y, R)$ is bounded from below over the admissible set \mathcal{A} . By virtue of (29), (34)₂ and (37) we can write

$$I(y, R) \geq C_0 \int_\omega \|E^e\|^2 a \, dx_1 dx_2 - \Lambda(y, R) \geq C_0 a_0 \|E^e\|_{L^2(\omega)}^2 - C (\|y\|_{H^1(\omega)} + 1)$$

and using (43) we deduce that there exist the constants $\bar{C}_3 > 0$ and \bar{C}_4 such that

$$I(y, R) \geq C_0 a_0 \lambda_0^2 (\|\partial_1 y\|_{L^2(\omega)}^2 + \|\partial_2 y\|_{L^2(\omega)}^2) - \bar{C}_3 \|y\|_{H^1(\omega)} - \bar{C}_4, \quad \forall (y, R) \in \mathcal{A}, \tag{44}$$

with a_0 specified by equation (34). We observe that the vector field $y - y^* \in H^1(\omega, \mathbb{R}^3)$ satisfies $y - y^* = \mathbf{0}$ on $\partial\omega_d$. Applying the Poincaré inequality we infer the existence of a constant $c_p > 0$ such that

$$\|\partial_1 (y - y^*)\|_{L^2(\omega)}^2 + \|\partial_2 (y - y^*)\|_{L^2(\omega)}^2 \geq c_p \|y - y^*\|_{H^1(\omega)}^2. \tag{45}$$

Using inequalities of the type $\|\partial_\alpha y\|_{L^2(\omega)}^2 \geq (\|\partial_\alpha (y - y^*)\|_{L^2(\omega)} - \|\partial_\alpha y^*\|_{L^2(\omega)})^2$ and (45) we find that

$$\begin{aligned} \|\partial_1 y\|_{L^2(\omega)}^2 + \|\partial_2 y\|_{L^2(\omega)}^2 &\geq c_p \|y - y^*\|_{H^1(\omega)}^2 \\ &\quad - 2 \|y - y^*\|_{H^1(\omega)} (\|\partial_1 y^*\|_{L^2(\omega)} + \|\partial_2 y^*\|_{L^2(\omega)}) + (\|\partial_1 y^*\|_{L^2(\omega)}^2 + \|\partial_2 y^*\|_{L^2(\omega)}^2). \end{aligned}$$

From the last inequality and (44) it follows that there exist some constants $\bar{C}_5 > 0$ and \bar{C}_6 with

$$I(\mathbf{y}, \mathbf{R}) \geq C_0 a_0 \lambda_0^2 c_p \|\mathbf{y} - \mathbf{y}^*\|_{H^1(\omega)}^2 - \bar{C}_5 \|\mathbf{y} - \mathbf{y}^*\|_{H^1(\omega)} + \bar{C}_6, \quad \forall (\mathbf{y}, \mathbf{R}) \in \mathcal{A}. \tag{46}$$

Since the constant $C_0 a_0 \lambda_0^2 c_p > 0$, the function $I(\mathbf{y}, \mathbf{R})$ is bounded from below over \mathcal{A} . Hence there exists an infimizing sequence $\{(\mathbf{y}_n, \mathbf{R}_n)\}_{n=1}^\infty \subset \mathcal{A}$ such that

$$\lim_{n \rightarrow \infty} I(\mathbf{y}_n, \mathbf{R}_n) = \inf \{I(\mathbf{y}, \mathbf{R}) \mid (\mathbf{y}, \mathbf{R}) \in \mathcal{A}\}. \tag{47}$$

In view of conditions (32) we have $I(\mathbf{y}^*, \mathbf{R}^*) < \infty$. The infimizing sequence $\{(\mathbf{y}_n, \mathbf{R}_n)\}_{n=1}^\infty$ can be chosen such that

$$I(\mathbf{y}_n, \mathbf{R}_n) \leq I(\mathbf{y}^*, \mathbf{R}^*) < \infty, \quad \forall n \geq 1. \tag{48}$$

Taking into account (46) and (48) we see that the sequence $\{\mathbf{y}_n\}_{n=1}^\infty$ is bounded in $\mathbf{H}^1(\omega, \mathbb{R}^3)$. Then, we can extract a subsequence of $\{\mathbf{y}_n\}_{n=1}^\infty$ (not relabeled) which converges weakly in $\mathbf{H}^1(\omega, \mathbb{R}^3)$ and moreover, according to Rellich's selection principle, it converges strongly in $L^2(\omega, \mathbb{R}^3)$, in other words there exists an element $\hat{\mathbf{y}} \in \mathbf{H}^1(\omega, \mathbb{R}^3)$ such that

$$\mathbf{y}_n \rightharpoonup \hat{\mathbf{y}} \text{ in } \mathbf{H}^1(\omega, \mathbb{R}^3), \quad \text{and} \quad \mathbf{y}_n \rightarrow \hat{\mathbf{y}} \text{ in } L^2(\omega, \mathbb{R}^3). \tag{49}$$

For any $n \in \mathbb{N}$, let us denote by \mathbf{E}_n^e and \mathbf{K}_n^e the strain measures corresponding to the fields $(\mathbf{y}_n, \mathbf{R}_n)$, defined by the relations (17) and (23). We have $\mathbf{E}_n^e, \mathbf{K}_n^e \in L^2(\omega, \mathbb{R}^{3 \times 3})$ and let E_n^e, K_n^e be the matrices of components in the basis $\{\mathbf{e}_i \otimes \mathbf{e}_j\}$, given by (18) and (25) in terms of $\{\mathbf{y}_n, \mathbf{R}_n\}$. From (27), (34)₂, (35), (37) and (48) we get

$$C_0 a_0 \|\mathbf{K}_n^e\|_{L^2(\omega)}^2 \leq \int_\omega W(\mathbf{E}_n^e, \mathbf{K}_n^e) a(x_1, x_2) dx_1 dx_2 \leq I(\mathbf{y}^*, \mathbf{R}^*) + C (\|\mathbf{y}_n\|_{H^1(\omega)} + 1).$$

Since $\{\mathbf{y}_n\}_{n=1}^\infty$ is bounded in $\mathbf{H}^1(\omega, \mathbb{R}^3)$, it follows from the last inequalities that $\{\mathbf{K}_n^e\}_{n=1}^\infty$ is bounded in $L^2(\omega, \mathbb{R}^{3 \times 3})$. In view of (38)₂, we deduce that $\{\text{axl}(\mathbf{R}_n^T \partial_\alpha \mathbf{R}_n)\}_{n=1}^\infty$ is bounded in $L^2(\omega, \mathbb{R}^3)$, or equivalently $\{\partial_\alpha \mathbf{R}_n\}_{n=1}^\infty$ is bounded in $L^2(\omega, \mathbb{R}^{3 \times 3})$, for $\alpha = 1, 2$. Since $\mathbf{R}_n \in SO(3)$ we have $\|\mathbf{R}_n\|^2 = 3$ and thus we can infer that the sequence $\{\mathbf{R}_n\}_{n=1}^\infty$ is bounded in $\mathbf{H}^1(\omega, \mathbb{R}^{3 \times 3})$. Hence, there exists a subsequence of $\{\mathbf{R}_n\}_{n=1}^\infty$ (not relabeled) and an element $\hat{\mathbf{R}} \in \mathbf{H}^1(\omega, \mathbb{R}^{3 \times 3})$ with

$$\mathbf{R}_n \rightharpoonup \hat{\mathbf{R}} \text{ in } \mathbf{H}^1(\omega, \mathbb{R}^{3 \times 3}), \quad \text{and} \quad \mathbf{R}_n \rightarrow \hat{\mathbf{R}} \text{ in } L^2(\omega, \mathbb{R}^{3 \times 3}). \tag{50}$$

We can show for the limit that $\hat{\mathbf{R}} \in SO(3)$. Indeed, since $\mathbf{R}_n \in SO(3)$ we have

$$\|\mathbf{R}_n \hat{\mathbf{R}}^T - \mathbb{1}_3\|_{L^2(\omega)} = \|\mathbf{R}_n (\hat{\mathbf{R}}^T - \mathbf{R}_n^T)\|_{L^2(\omega)} = \|\hat{\mathbf{R}} - \mathbf{R}_n\|_{L^2(\omega)} \rightarrow 0,$$

in other words, $\mathbf{R}_n \hat{\mathbf{R}}^T \rightarrow \mathbb{1}_3$ in $L^2(\omega, \mathbb{R}^{3 \times 3})$. On the other hand, we can write

$$\|\mathbf{R}_n \hat{\mathbf{R}}^T - \hat{\mathbf{R}} \hat{\mathbf{R}}^T\|_{L^1(\omega)} = \|(\mathbf{R}_n - \hat{\mathbf{R}}) \hat{\mathbf{R}}^T\|_{L^1(\omega)} \leq 3 \|\mathbf{R}_n - \hat{\mathbf{R}}\|_{L^2(\omega)} \|\hat{\mathbf{R}}\|_{L^2(\omega)} \rightarrow 0,$$

which means that $\mathbf{R}_n \hat{\mathbf{R}}^T \rightarrow \hat{\mathbf{R}} \hat{\mathbf{R}}^T$ in $L^1(\omega, \mathbb{R}^{3 \times 3})$. Consequently, we find $\hat{\mathbf{R}} \hat{\mathbf{R}}^T = \mathbb{1}_3$ so that $\hat{\mathbf{R}} \in \mathbf{H}^1(\omega, SO(3))$.

By virtue of the relations $(\mathbf{y}_n, \mathbf{R}_n) \in \mathcal{A}$, (49) and (50), we derive that $\hat{\mathbf{y}} = \mathbf{y}^*$ on ∂S_d^0 and $\hat{\mathbf{R}} = \mathbf{R}^*$ on ∂S_d^0 in the sense of traces. Hence, we obtain that the limit pair satisfies $(\hat{\mathbf{y}}, \hat{\mathbf{R}}) \in \mathcal{A}$.

Let us construct the elements $\hat{\mathbf{E}}^e, \hat{\mathbf{K}}^e \in L^2(\omega, \mathbb{R}^{3 \times 3})$ defined in terms of the fields $(\hat{\mathbf{y}}, \hat{\mathbf{R}})$ by the relations (17) and (23). Then, the matrices of components \hat{E}^e, \hat{K}^e are expressed in terms of the components $(\hat{\mathbf{y}}, \hat{\mathbf{R}})$ by (18) and (25), in other words

$$\begin{aligned} \hat{E}^e &= Q^0 (\hat{R}^T \partial_1 \hat{\mathbf{y}} - Q^{0,T} \partial_1 \mathbf{y}^0 \mid \hat{R}^T \partial_2 \hat{\mathbf{y}} - Q^{0,T} \partial_2 \mathbf{y}^0 \mid 0) P^{-1}, \\ \hat{K}^e &= Q^0 (\text{axl}(\hat{R}^T \partial_1 \hat{\mathbf{R}}) - \text{axl}(Q^{0,T} \partial_1 Q^0) \mid \text{axl}(\hat{R}^T \partial_2 \hat{\mathbf{R}}) - \text{axl}(Q^{0,T} \partial_2 Q^0) \mid 0) P^{-1}. \end{aligned} \tag{51}$$

Next, we want to show that there exist some subsequences (not relabeled) of $\{E_n^e\}$ and $\{K_n^e\}$ such that

$$E_n^e \rightharpoonup \hat{E}^e \text{ in } L^2(\omega, \mathbb{R}^{3 \times 3}), \text{ and } K_n^e \rightharpoonup \hat{K}^e \text{ in } L^2(\omega, \mathbb{R}^{3 \times 3}). \tag{52}$$

As shown above, the sequence $\{y_n\}_{n=1}^\infty$ is bounded in $H^1(\omega, \mathbb{R}^3)$. It follows that $\{\partial_\alpha y_n\}_{n=1}^\infty$ is bounded in $L^2(\omega, \mathbb{R}^3)$ and the sequence $\{R_n^T \partial_\alpha y_n\}_{n=1}^\infty$ is bounded in $L^2(\omega, \mathbb{R}^3)$, since $R_n \in SO(3)$. Consequently, there exists a subsequence (not relabeled) and an element $\xi_\alpha \in L^2(\omega, \mathbb{R}^3)$ such that

$$R_n^T \partial_\alpha y_n \rightharpoonup \xi_\alpha \text{ in } L^2(\omega, \mathbb{R}^3). \tag{53}$$

On the other hand, let $\phi \in C_0^\infty(\omega, \mathbb{R}^3)$ be an arbitrary test function. Then, using the properties of the scalar product we deduce

$$\begin{aligned} & \int_\omega (R_n^T \partial_\alpha y_n - \hat{R}^T \partial_\alpha \hat{y}) \cdot \phi \, dx_1 dx_2 \\ &= \int_\omega \hat{R}^T (\partial_\alpha y_n - \partial_\alpha \hat{y}) \cdot \phi \, dx_1 dx_2 + \int_\omega (R_n^T - \hat{R}^T) \partial_\alpha y_n \cdot \phi \, dx_1 dx_2 \\ &= \int_\omega (\partial_\alpha y_n - \partial_\alpha \hat{y}) \cdot \hat{R} \phi \, dx_1 dx_2 + \int_\omega (R_n - \hat{R}, \partial_\alpha y_n \otimes \phi) dx_1 dx_2 \\ &\leq \|R_n - \hat{R}\|_{L^2(\omega)} \|\partial_\alpha y_n \otimes \phi\|_{L^2(\omega)} + \int_\omega (\partial_\alpha y_n - \partial_\alpha \hat{y}) \cdot \hat{R} \phi \, dx_1 dx_2, \end{aligned}$$

since the relations (49), (50) and $\hat{R} \phi \in L^2(\omega, \mathbb{R}^3)$ hold, and $\|\partial_\alpha y_n \otimes \phi\|$ is bounded. Thus, we get

$$\int_\omega (R_n^T \partial_\alpha y_n) \cdot \phi \, dx_1 dx_2 \longrightarrow \int_\omega (\hat{R}^T \partial_\alpha \hat{y}) \cdot \phi \, dx_1 dx_2, \quad \forall \phi \in C_0^\infty(\omega, \mathbb{R}^3). \tag{54}$$

By comparison of (53) and (54) we find $\ell_\alpha = \hat{R}^T \partial_\alpha \hat{y}$, which means that $R_n^T \partial_\alpha y_n \rightharpoonup \hat{R}^T \partial_\alpha \hat{y}$ in $L^2(\omega, \mathbb{R}^3)$, or equivalently

$$(R_n^T \partial_\alpha y_n - Q^{0,T} \partial_\alpha y^0) \rightharpoonup (\hat{R}^T \partial_\alpha \hat{y} - R_0^T \partial_\alpha y^0) \text{ in } L^2(\omega, \mathbb{R}^3). \tag{55}$$

Taking into account (18), (51)₁ and hypotheses (33) and (34), we obtain from (55) that $E_n^e \rightharpoonup \hat{E}^e$ in $L^2(\omega, \mathbb{R}^{3 \times 3})$, in other words, the relation (52)₁ holds.

To prove (52)₂ we start from the fact that the sequence $\{R_n^T \partial_\alpha R_n\}_{n=1}^\infty$ is bounded in $L^2(\omega, \mathbb{R}^{3 \times 3})$, as we proved previously. Then, there exists a subsequence (not relabeled) and an element $\zeta_\alpha \in L^2(\omega, \mathbb{R}^{3 \times 3})$ such that

$$R_n^T \partial_\alpha R_n \rightharpoonup \zeta_\alpha \text{ in } L^2(\omega, \mathbb{R}^{3 \times 3}). \tag{56}$$

On the other hand, for any test function $\Phi \in C_0^\infty(\omega, \mathbb{R}^{3 \times 3})$ we can write

$$\begin{aligned} & \int_\omega \langle R_n^T \partial_\alpha R_n - \hat{R}^T \partial_\alpha \hat{R}, \Phi \rangle dx_1 dx_2 = \int_\omega \langle \hat{R}^T (\partial_\alpha R_n - \partial_\alpha \hat{R}), \Phi \rangle dx_1 dx_2 + \int_\omega \langle (R_n^T - \hat{R}^T) \partial_\alpha R_n, \Phi \rangle dx_1 dx_2 \leq \\ & \int_\omega \langle \partial_\alpha R_n - \partial_\alpha \hat{R}, \hat{R} \Phi \rangle dx_1 dx_2 + \|R_n - \hat{R}\|_{L^2(\omega)} \|\partial_\alpha R_n \Phi^T\|_{L^2(\omega)} \longrightarrow 0, \end{aligned}$$

since $\hat{R} \Phi \in L^2(\omega, \mathbb{R}^{3 \times 3})$, $\|\partial_\alpha R_n \Phi^T\|$ is bounded, and the relations (50) hold. Consequently, we have

$$\int_\omega \langle R_n^T \partial_\alpha R_n, \Phi \rangle dx_1 dx_2 \longrightarrow \int_\omega \langle \hat{R}^T \partial_\alpha \hat{R}, \Phi \rangle dx_1 dx_2, \quad \forall \Phi \in C_0^\infty(\omega, \mathbb{R}^{3 \times 3}),$$

and by comparison with (56) we deduce that $\zeta_\alpha = \hat{R}^T \partial_\alpha \hat{R}$, in other words, the convergence $R_n^T \partial_\alpha R_n \rightharpoonup \hat{R}^T \partial_\alpha \hat{R}$ holds in $L^2(\omega, \mathbb{R}^{3 \times 3})$. It follows that

$$[\text{axl}(R_n^T \partial_\alpha R_n) - \text{axl}(R_0^T \partial_\alpha Q^0)] \rightharpoonup [\text{axl}(\hat{R}^T \partial_\alpha \hat{R}) - \text{axl}(R_0^T \partial_\alpha Q^0)] \text{ in } L^2(\omega, \mathbb{R}^{3 \times 3}),$$

and from (25), (33), (34) and (51)₂ we derive that the convergence (52)₂ holds true.

In the last step of the proof we use the convexity of the strain energy density W . In view of (52), we have

$$\int_{\omega} W(\hat{E}^e, \hat{K}^e) a(x_1, x_2) dx_1 dx_2 \leq \liminf_{n \rightarrow \infty} \int_{\omega} W(E_n^e, K_n^e) a(x_1, x_2) dx_1 dx_2, \tag{57}$$

since W is convex in (E^e, K^e) . Taking into account the hypotheses (31), the continuity of the load potential functions Π_{S^0} , $\Pi_{\partial S_f^0}$, and the convergence relations (49)₂ and (50)₂, we deduce

$$\Lambda(\hat{y}, \hat{R}) = \lim_{n \rightarrow \infty} \Lambda(y_n, R_n). \tag{58}$$

From (27), (29), (57) and (58) we get

$$I(\hat{y}, \hat{R}) \leq \liminf_{n \rightarrow \infty} I(y_n, R_n). \tag{59}$$

Finally, the relations (47) and (59) show that

$$I(\hat{y}, \hat{R}) = \inf \{ I(y, R) \mid (y, R) \in \mathcal{A} \}.$$

Since $(\hat{y}, \hat{R}) \in \mathcal{A}$, we conclude that (\hat{y}, \hat{R}) is a minimizing solution pair of our minimization problem. The proof is complete. ■

Remark 8 *The solution fields satisfy the following regularity conditions*

$$\hat{y} \in H^1(\omega, \mathbb{R}^3), \quad \hat{R} \in L^\infty(\omega, SO(3)) \cap H^1(\omega, SO(3)).$$

Thus, the position vector \hat{y} and the total rotation field \hat{R} may fail to be continuous, according to the limit case of Sobolev embedding.

Remark 9 *We observe that the boundary conditions imposed on the orthogonal tensor R can be relaxed in the definition of the admissible set \mathcal{A} . Thus, one can prove the existence of minimizers for the minimization problem (27) over the following larger admissible set*

$$\tilde{\mathcal{A}} = \{ (y, R) \in H^1(\omega, \mathbb{R}^3) \times H^1(\omega, SO(3)) \mid y|_{\partial\omega_d} = y^* \}.$$

This assertion can be proved in the same way as Theorem 6. For a discussion of possible alternative boundary conditions for the field R on $\partial\omega_d$ we refer to the works [38, 42].

5. Applications of the theorem and discussions

In this section we present some important special cases for the choice of the energy density W where Theorem 6 can be successfully applied to show the existence of minimizers.

Let us first discuss the choice of the three initial directors $\{d_i^0\}$ in the reference configuration, in other words, the specification of the proper orthogonal tensor $Q^0 = d_i^0 \otimes e_i$. One judicious choice for the tensor Q^0 is the following

$$Q^0 = \text{polar}(P) = \text{polar}(\nabla \Theta(x_1, x_2, 0)), \tag{60}$$

where $P = a_i \otimes e_i = \partial_\alpha y^0 \otimes e_\alpha + n^0 \otimes e_3$ has been introduced previously in (9) and $\text{polar}(T)$ denotes the orthogonal tensor given by the polar decomposition of any tensor T .

Remark 10 *If the tensor Q^0 is given by (60), then the (initial) directors d_α^0 belong to the tangent plane at any point of S^0 and $d_3^0 = n^0$. Indeed, let $P = Q^0 U^0$ be the polar decomposition of P . Using the matrices*

of components in the $\{e_i \otimes e_j\}$ tensor basis, we write this relation as $P = Q^0 U^0$, and from (40) we derive consecutively

$$U^{0,T} U^0 = P^T P = \begin{bmatrix} a_{11} & a_{12} & 0 \\ a_{12} & a_{22} & 0 \\ 0 & 0 & 1 \end{bmatrix}, \quad U^0 = \begin{bmatrix} u_{11}^0 & u_{12}^0 & 0 \\ u_{12}^0 & u_{22}^0 & 0 \\ 0 & 0 & 1 \end{bmatrix}, \quad (U^0)^{-1} = \begin{bmatrix} \bar{u}_{11}^0 & \bar{u}_{12}^0 & 0 \\ \bar{u}_{12}^0 & \bar{u}_{22}^0 & 0 \\ 0 & 0 & 1 \end{bmatrix},$$

where $u_{\alpha\beta}^0$ and $\bar{u}_{\alpha\beta}^0$ are some given real functions of (x_1, x_2) . In view of (11), it follows that

$$Q^0 = P (U^0)^{-1} = \left(a_1 \mid a_2 \mid n^0 \right)_{3 \times 3} \begin{bmatrix} \bar{u}_{11}^0 & \bar{u}_{12}^0 & 0 \\ \bar{u}_{12}^0 & \bar{u}_{22}^0 & 0 \\ 0 & 0 & 1 \end{bmatrix} \Rightarrow Q^0 e_3 = n^0, \tag{61}$$

from which we can see that the third column of the matrix Q^0 is equal to n^0 . On the other hand, by definition (1)₂, the initial rotation field Q^0 is given by $Q^0 = d_i^0 \otimes e_i$ and the matrix Q^0 can be written in column form as

$$Q^0 = \left(d_1^0 \mid d_2^0 \mid d_3^0 \right)_{3 \times 3}. \tag{62}$$

If we compare (61) and (62) we find that $d_3^0 = n^0$. Thus, we have $d_3^0 = n^0$ and $\{d_1^0, d_2^0\}$ is an orthonormal basis in the tangent plane, at any point of S^0 .

If we choose the tensor Q^0 as in (60), then in order to satisfy (33)₂ we need to consider an additional regularity assumption on the initial configuration, namely

$$\text{polar}(P) = \text{polar}(\nabla \Theta(x_1, x_2, 0)) \in H^1(\omega, SO(3)),$$

which is equivalent to $\text{Curl}[\text{polar}(\nabla \Theta(x_1, x_2, 0))] \in L^2(\omega, SO(3))$ (cf. [62]). A stronger sufficient condition is $\Theta \in W^{1,\infty}(\omega, \mathbb{R}^3) \cap H^2(\omega, \mathbb{R}^3)$.

It is possible to simplify the form of the equations in the case of an orthogonal parametrization of the initial surface S^0 . If we assume that the curvilinear coordinates (x_1, x_2) are such that the basis $\{a_1, a_2, n^0\}$ is orthonormal, then the initial surface S^0 is formally parametrized by orthogonal arc-length coordinates [13] and we have

$$a_\alpha = a^\alpha, \quad a_{\alpha\beta} = a^{\alpha\beta} = \delta_{\alpha\beta}. \tag{63}$$

Remark 11 The Theorema Egregium (Gauss) can be put into the following form: the Gaussian curvature K can be found given the full knowledge of the first fundamental form of the surface and expressed via the first fundamental form and its partial derivatives of first and second order (the Brioschi formula). Therefore, the Gaussian curvature of an embedded smooth surface in \mathbb{R}^3 is invariant under local isometries, in other words, if the parametrization $y^0 : \omega \subset \mathbb{R}^2 \rightarrow \mathbb{R}^3$ of the surface from a flat reference configuration ω is given such that $(\nabla y^0)^T \nabla y^0 = \mathbb{1}_2$ (the basis $\{a_1, a_2, n^0\}$ is orthonormal), then the curvature K of the surface $y^0(\omega)$ is necessarily zero. This is only the case for developable surfaces.

For general surfaces it is therefore impossible to determine, even locally, an orthonormal parametrization. However, in FEM approaches one may think in a discrete pointwise manner as in [13].

For example, let S^0 be a cylindrical surface (which is a developable surface) with generators parallel to e_3 . The position vector y^0 is given by

$$y^0 = y^0(\theta, z) = r_0 \cos \frac{\theta}{r_0} e_1 + r_0 \sin \frac{\theta}{r_0} e_2 + z e_3 \quad (r_0 > 0 \text{ constant}).$$

Choosing the curvilinear coordinates $x_1 = \theta, x_2 = z$, we have

$$a_1 = \partial_1 y^0 = -\sin \frac{\theta}{r_0} e_1 + \cos \frac{\theta}{r_0} e_2, \quad a_2 = \partial_2 y^0 = e_3, \quad n^0 = \cos \frac{\theta}{r_0} e_1 + \sin \frac{\theta}{r_0} e_2,$$

so that $\{a_1, a_2, n^0\}$ is orthonormal.

In view of (60)–(63), we obtain in this case that $Q^0 = P$ (since $U^0 = \mathbb{1}_3$ and $\text{polar}(P) = P \in SO(3)$) and the directors $\{d_i^0\}$ in the reference configuration coincide with $\{a_1, a_2, n^0\}$ in each point of S^0 :

$$d_\alpha^0 = a_\alpha = \partial_\alpha y^0, \quad d_3^0 = a_3 = n^0, \quad a_i = Q^0 e_i, \quad d_i = RQ^{0,T} a_i. \quad (64)$$

The expressions of the elastic strain measures E^e and K^e may be simplified in this situation. By virtue of (63) and (64) we get

$$\begin{aligned} Q^0(R^T \partial_\alpha y - Q^{0,T} \partial_\alpha y^0) &= Q^0 R^T \partial_\alpha y - a_\alpha \\ &= (a_i \cdot Q^0 R^T \partial_\alpha y - \delta_{\alpha i}) a_i = (d_i \cdot \partial_\alpha y - \delta_{\alpha i}) a_i. \end{aligned} \quad (65)$$

We can write $R^T \partial_\alpha R = (d_i \otimes e_i)^T (\partial_\alpha d_j \otimes e_j) = (d_i \cdot \partial_\alpha d_j) e_i \otimes e_j$, so that we find

$$\text{axl}(R^T \partial_\alpha R) = \frac{1}{2} e_{ijk} (d_k \cdot \partial_\alpha d_j) e_i, \quad \text{axl}(Q^{0,T} \partial_\alpha Q^0) = \frac{1}{2} e_{ijk} (a_k \cdot \partial_\alpha a_j) e_i,$$

where e_{ijk} is the permutation symbol. The last relations and $Q^{0,T} a_i = e_i$ yield

$$\begin{aligned} Q^0[\text{axl}(R^T \partial_\alpha R) - \text{axl}(Q^{0,T} \partial_\alpha Q^0)] &= [(\text{axl}(R^T \partial_\alpha R) - \text{axl}(Q^{0,T} \partial_\alpha Q^0)) \cdot e_i] a_i \\ &= \frac{1}{2} e_{ijk} [(d_k \cdot \partial_\alpha d_j) - (a_k \cdot \partial_\alpha a_j)] a_i. \end{aligned} \quad (66)$$

Using the relations (17), (23), (65) and (66) we decompose the strain tensor E^e and the curvature tensor K^e in the basis $\{a_i \otimes a_\alpha\}$ as follows

$$\begin{aligned} E^e &= \tilde{E}_{i\alpha}^e a_i \otimes a_\alpha, \quad \tilde{E}_{i\alpha}^e = d_i \cdot \partial_\alpha y - \delta_{\alpha i}, \quad K^e = \tilde{K}_{i\alpha}^e a_i \otimes a_\alpha, \\ \tilde{K}_{1\alpha}^e &= d_3 \cdot \partial_\alpha d_2 - a_3 \cdot \partial_\alpha a_2, \quad \tilde{K}_{2\alpha}^e = d_1 \cdot \partial_\alpha d_3 - a_1 \cdot \partial_\alpha a_3, \quad \tilde{K}_{3\alpha}^e = d_2 \cdot \partial_\alpha d_1 - a_2 \cdot \partial_\alpha a_1. \end{aligned} \quad (67)$$

For later reference, we introduce the notations

$$E_{\parallel}^e = E^e - (n^0 \otimes n^0) E^e, \quad K_{\parallel}^e = K^e - (n^0 \otimes n^0) K^e. \quad (68)$$

Then, from (67) we get

$$\begin{aligned} E_{\parallel}^e &= \tilde{E}_{\alpha\beta}^e a_\alpha \otimes a_\beta, \quad n^0 E^e = E^{e,T} n^0 = \tilde{E}_{3\alpha}^e a_\alpha, \\ K_{\parallel}^e &= \tilde{K}_{\alpha\beta}^e a_\alpha \otimes a_\beta, \quad n^0 K^e = K^{e,T} n^0 = \tilde{K}_{3\alpha}^e a_\alpha. \end{aligned} \quad (69)$$

If we denote the matrices by $\tilde{E}^e = (\tilde{E}_{ij}^e)_{3 \times 3}$, $\tilde{K}^e = (\tilde{K}_{ij}^e)_{3 \times 3}$, and also

$$\begin{aligned} \tilde{E}_{\parallel}^e &= \begin{bmatrix} \tilde{E}_{11}^e & \tilde{E}_{12}^e \\ \tilde{E}_{21}^e & \tilde{E}_{22}^e \end{bmatrix} = \begin{bmatrix} d_1 \cdot \partial_1 y - 1 & d_1 \cdot \partial_2 y \\ d_2 \cdot \partial_1 y & d_2 \cdot \partial_2 y - 1 \end{bmatrix}, \\ (\tilde{E}^{e,T} n^0) &= [\tilde{E}_{31}^e \quad \tilde{E}_{32}^e] = [d_3 \cdot \partial_1 y \quad d_3 \cdot \partial_2 y], \\ \tilde{K}_{\parallel}^e &= \begin{bmatrix} \tilde{K}_{11}^e & \tilde{K}_{12}^e \\ \tilde{K}_{21}^e & \tilde{K}_{22}^e \end{bmatrix} = \begin{bmatrix} d_3 \cdot \partial_1 d_2 - a_3 \cdot \partial_1 a_2 & d_3 \cdot \partial_2 d_2 - a_3 \cdot \partial_2 a_2 \\ d_1 \cdot \partial_1 d_3 - a_1 \cdot \partial_1 a_3 & d_1 \cdot \partial_2 d_3 - a_1 \cdot \partial_2 a_3 \end{bmatrix}, \\ (\tilde{K}^{e,T} n^0) &= [\tilde{K}_{31}^e \quad \tilde{K}_{32}^e] = [d_2 \cdot \partial_1 d_1 - a_2 \cdot \partial_1 a_1 \quad d_2 \cdot \partial_2 d_1 - a_2 \cdot \partial_2 a_1], \end{aligned} \quad (70)$$

then the relations (67) and (69) can be written in matrix form

$$\begin{aligned} \tilde{E}^e &= \begin{bmatrix} \tilde{E}_{11}^e & \tilde{E}_{12}^e & 0 \\ \tilde{E}_{21}^e & \tilde{E}_{22}^e & 0 \\ \tilde{E}_{31}^e & \tilde{E}_{32}^e & 0 \end{bmatrix} = \begin{bmatrix} (\tilde{E}_{\parallel}^e)_{2 \times 2} & 0_{2 \times 1} \\ (\tilde{E}^{e,T} n^0)_{1 \times 2} & 0 \end{bmatrix}_{3 \times 3} = \begin{bmatrix} d_1 \cdot \partial_1 y - 1 & d_1 \cdot \partial_2 y & 0 \\ d_2 \cdot \partial_1 y & d_2 \cdot \partial_2 y - 1 & 0 \\ d_3 \cdot \partial_1 y & d_3 \cdot \partial_2 y & 0 \end{bmatrix}, \\ \tilde{K}^e &= \begin{bmatrix} \tilde{K}_{11}^e & \tilde{K}_{12}^e & 0 \\ \tilde{K}_{21}^e & \tilde{K}_{22}^e & 0 \\ \tilde{K}_{31}^e & \tilde{K}_{32}^e & 0 \end{bmatrix} = \begin{bmatrix} (\tilde{K}_{\parallel}^e)_{2 \times 2} & 0_{2 \times 1} \\ (\tilde{K}^{e,T} n^0)_{1 \times 2} & 0 \end{bmatrix}_{3 \times 3} \\ &= \tilde{K} - \tilde{K}^0 = \begin{bmatrix} d_3 \cdot \partial_1 d_2 & d_3 \cdot \partial_2 d_2 & 0 \\ d_1 \cdot \partial_1 d_3 & d_1 \cdot \partial_2 d_3 & 0 \\ d_2 \cdot \partial_1 d_1 & d_2 \cdot \partial_2 d_1 & 0 \end{bmatrix} - \begin{bmatrix} a_3 \cdot \partial_1 a_2 & a_3 \cdot \partial_2 a_2 & 0 \\ a_1 \cdot \partial_1 a_3 & a_1 \cdot \partial_2 a_3 & 0 \\ a_2 \cdot \partial_1 a_1 & a_2 \cdot \partial_2 a_1 & 0 \end{bmatrix}. \end{aligned} \quad (71)$$

These expressions are completely similar to the strain measures for planar shells introduced in [38, 42].

Let us next discuss some important classes of elastic shells.

5.1. Isotropic shells

In the resultant 6-parameter theory of shells, the strain energy density for isotropic shells has been presented in various forms. The simplest expression of $W(\mathbf{E}^e, \mathbf{K}^e)$ has been proposed in the papers [14, 15] in the form

$$2W(\mathbf{E}^e, \mathbf{K}^e) = C[\nu(\text{tr}\mathbf{E}_{\parallel}^e)^2 + (1 - \nu)\text{tr}(\mathbf{E}_{\parallel}^{e,T}\mathbf{E}_{\parallel}^e)] + \alpha_s C(1 - \nu)\mathbf{n}^0\mathbf{E}^e\mathbf{E}^{e,T}\mathbf{n}^0 + D[\nu(\text{tr}\mathbf{K}_{\parallel}^e)^2 + (1 - \nu)\text{tr}(\mathbf{K}_{\parallel}^{e,T}\mathbf{K}_{\parallel}^e)] + \alpha_t D(1 - \nu)\mathbf{n}^0\mathbf{K}^e\mathbf{K}^{e,T}\mathbf{n}^0, \tag{72}$$

where $C = Eh/(1 - \nu^2)$ is the stretching (in-plane) stiffness of the shell, $D = Eh^3/(12(1 - \nu^2))$ is the bending stiffness, h is the thickness of the shell, and α_s, α_t are two shear-correction factors. Also, E and ν denote the Young modulus and Poisson ratio of the isotropic and homogeneous material. By the numerical treatment of non-linear shell problems, the values of the shear correction factors have been set to $\alpha_s = 5/6, \alpha_t = 7/10$ in [15]. The value $\alpha_s = 5/6$ is a classical suggestion, which has been previously deduced analytically by Reissner in the case of plates [35, 54]. Also, the value $\alpha_t = 7/10$ was proposed earlier in [50, p. 78] and has been suggested in the work [49]. However, the discussion concerning the possible values of shear correction factors for shells is long and controversial in literature [35, 36].

With the help of matrices (70), we can express the strain energy density (72) in the alternative form

$$2W(\mathbf{E}^e, \mathbf{K}^e) = C(1 - \nu)(\|\text{dev}_2 \text{sym} \tilde{E}_{\parallel}^e\|^2 + \|\text{skew} \tilde{E}_{\parallel}^e\|^2) + C\frac{1 + \nu}{2}(\text{tr} \tilde{E}_{\parallel}^e)^2 + \alpha_s C(1 - \nu)\|\tilde{E}^{e,T}\mathbf{n}^0\|^2 + D(1 - \nu)(\|\text{dev}_2 \text{sym} \tilde{K}_{\parallel}^e\|^2 + \|\text{skew} \tilde{K}_{\parallel}^e\|^2) + D\frac{1 + \nu}{2}(\text{tr} \tilde{K}_{\parallel}^e)^2 + \alpha_t D(1 - \nu)\|\tilde{K}^{e,T}\mathbf{n}^0\|^2, \tag{73}$$

where $\text{sym}X = \frac{1}{2}(X + X^T)$ is the symmetric part, $\text{skew}X = \frac{1}{2}(X - X^T)$ is the skew-symmetric part, and $\text{dev}_2 X = X - \frac{1}{2}(\text{tr}X)\mathbb{I}_2$ is the deviatoric part of any 2×2 matrix X . The coefficients in (73) are expressed in terms of the Lamé constants of the material λ and μ by the relations

$$C\frac{1 + \nu}{2} = h\frac{\mu(2\mu + 3\lambda)}{2\mu + \lambda}, \quad C(1 - \nu) = 2\mu h, \quad D\frac{1 + \nu}{2} = \frac{h^3}{12}\frac{\mu(2\mu + 3\lambda)}{2\mu + \lambda}, \quad D(1 - \nu) = \frac{\mu h^3}{6}.$$

Then, we obtain that the given quadratic form (73) is positive definite if and only if the coefficients E and ν satisfy the inequalities

$$E > 0, \quad -1 < \nu < \frac{1}{2}. \tag{74}$$

In terms of the Lamé moduli of the material, the inequalities (74) are equivalent to

$$\mu > 0, \quad 2\mu + 3\lambda > 0.$$

These conditions are guaranteed by the positive definiteness of the 3D quadratic elastic strain energy for isotropic materials. Thus, we find that the strain energy W is convex and satisfies the coercivity condition (35), so that the hypotheses of Theorem 6 are fulfilled. Applying Theorem 6 we obtain (under suitable assumptions on the given load and boundary data, and the reference configuration $(\mathbf{y}^0, \mathbf{Q}^0)$) the existence of minimizers for isotropic shells with strain energy density in the form (72).

In [24], Eremeyev and Pietraszkiewicz have proposed a more general form of the strain energy density, namely

$$2W(\mathbf{E}^e, \mathbf{K}^e) = \alpha_1(\text{tr}\mathbf{E}_{\parallel}^e)^2 + \alpha_2\text{tr}(\mathbf{E}_{\parallel}^e)^2 + \alpha_3\text{tr}(\mathbf{E}_{\parallel}^{e,T}\mathbf{E}_{\parallel}^e) + \alpha_4\mathbf{n}^0\mathbf{E}^e\mathbf{E}^{e,T}\mathbf{n}^0 + \beta_1(\text{tr}\mathbf{K}_{\parallel}^e)^2 + \beta_2\text{tr}(\mathbf{K}_{\parallel}^e)^2 + \beta_3\text{tr}(\mathbf{K}_{\parallel}^{e,T}\mathbf{K}_{\parallel}^e) + \beta_4\mathbf{n}^0\mathbf{K}^e\mathbf{K}^{e,T}\mathbf{n}^0. \tag{75}$$

The eight coefficients α_k, β_k ($k = 1, 2, 3, 4$) can depend in general on the structure curvature tensor $\mathbf{K}^0 = \text{axl}(\partial_\alpha \mathbf{Q}^0 \mathbf{Q}^{0,T}) \otimes \mathbf{a}^\alpha$ of the reference configuration. For the sake of simplicity, we assume in our discussion that the coefficients α_k and β_k are constant. We can decompose the strain energy density (75) in the in-plane part $W_{\text{plane}}(\mathbf{E}^e)$ and the curvature part $W_{\text{curv}}(\mathbf{K}^e)$ and write their expressions using the matrices of components (70) in the form

$$W(\mathbf{E}^e, \mathbf{K}^e) = W_{\text{plane}}(\mathbf{E}^e) + W_{\text{curv}}(\mathbf{K}^e), \quad (76)$$

$$\begin{aligned} 2W_{\text{plane}}(\mathbf{E}^e) &= (\alpha_2 + \alpha_3) \|\text{sym } \tilde{E}_{\parallel}^e\|^2 + (\alpha_3 - \alpha_2) \|\text{skew } \tilde{E}_{\parallel}^e\|^2 + \alpha_1 (\text{tr } \tilde{E}_{\parallel}^e)^2 + \alpha_4 \|\tilde{E}^{e,T} n^0\|^2, \\ 2W_{\text{curv}}(\mathbf{K}^e) &= (\beta_2 + \beta_3) \|\text{sym } \tilde{K}_{\parallel}^e\|^2 + (\beta_3 - \beta_2) \|\text{skew } \tilde{K}_{\parallel}^e\|^2 + \beta_1 (\text{tr } \tilde{K}_{\parallel}^e)^2 + \beta_4 \|\tilde{K}^{e,T} n^0\|^2. \end{aligned}$$

The in-plane part of the energy density (76) can equivalently be written as

$$\begin{aligned} 2W_{\text{plane}}(\mathbf{E}^e) &= \underbrace{(\alpha_2 + \alpha_3) \|\text{dev}_2 \text{sym } \tilde{E}_{\parallel}^e\|^2}_{\text{in-plane shear-stretch energy}} + \underbrace{(\alpha_3 - \alpha_2) \|\text{skew } \tilde{E}_{\parallel}^e\|^2}_{\text{in-plane drill rotation energy}} \\ &+ \underbrace{\left(\alpha_1 + \frac{\alpha_2 + \alpha_3}{2}\right) (\text{tr } \tilde{E}_{\parallel}^e)^2}_{\text{in-plane elongational stretch energy}} + \underbrace{\alpha_4 \|\tilde{E}^{e,T} n^0\|^2}_{\text{transverse shear energy}}. \end{aligned} \quad (77)$$

The above forms of the strain energy W are expressed in terms of the components of the tensors \mathbf{E}^e and \mathbf{K}^e in the basis $\{\mathbf{a}_i \otimes \mathbf{a}_\alpha\}$, in other words, in terms of the elements of the matrices (70). Denoting the coefficient $(\alpha_3 - \alpha_2)$ in (77) by μ_c^{drill} , we remark that the term

$$\mu_c^{\text{drill}} \|\text{skew } \tilde{E}_{\parallel}^e\|^2, \quad \text{with} \quad \mu_c^{\text{drill}} := \alpha_3 - \alpha_2, \quad (78)$$

describes the quadratic in-plane drill rotation energy of the shell. We call the coefficient μ_c^{drill} the *linear in-plane rotational couple modulus*, in analogy to the Cosserat couple modulus in the 3D Cosserat theory [39].

Remark 12 *The planar isotropic Cosserat shells have also been investigated in [38, 42], using a model derived directly from the 3D equations of Cosserat elasticity. The expressions (76) and (77) of the strain energy density are essentially the same as the strain energy of the Cosserat model for planar shells [38]. By comparing these two approaches (6-parameter resultant shells and Cosserat model) we deduce the following identification of the constitutive coefficients $\alpha_1, \dots, \alpha_4$*

$$\alpha_1 = h \frac{2\mu\lambda}{2\mu + \lambda}, \quad \alpha_2 = h(\mu - \mu_c), \quad \alpha_3 = h(\mu + \mu_c), \quad \alpha_4 = \kappa h(\mu + \mu_c), \quad (79)$$

where μ_c is the Cosserat couple modulus of the 3D continuum, and κ is a formal shear correction factor. From (78) and (79) we observe that

$$\mu_c^{\text{drill}} = \alpha_3 - \alpha_2 = 2h\mu_c, \quad (80)$$

which means that the in-plane rotational couple modulus μ_c^{drill} of the Cosserat shell model is determined by the Cosserat couple modulus μ_c of the 3D Cosserat material.

The relations (79) are similar to the corresponding relations in the linear theory of micropolar plates (see [3, eqs (45)]). From a mathematical viewpoint, the difference between the two sets of relations consists of the notations used and the value of the shear correction factor.

Looking at (76) and (77) we observe that the quadratic form $W(\mathbf{E}^e, \mathbf{K}^e)$ is positive definite if and only if the coefficients verify the conditions

$$\begin{aligned} 2\alpha_1 + \alpha_2 + \alpha_3 &> 0, & \alpha_2 + \alpha_3 &> 0, & \alpha_3 - \alpha_2 &> 0, & \alpha_4 &> 0, \\ 2\beta_1 + \beta_2 + \beta_3 &> 0, & \beta_2 + \beta_3 &> 0, & \beta_3 - \beta_2 &> 0, & \beta_4 &> 0. \end{aligned} \quad (81)$$

Provided that the conditions (81) are satisfied, the strain energy function $W(\mathbf{E}^e, \mathbf{K}^e)$ is convex and coercive in the sense of (35). By virtue of Theorem 6, in this case the minimization problem associated with the deformation of isotropic elastic shells admits at least one solution.

Remark 13 The same conditions (81) have been imposed in [22] to establish existence results in the linearized theory of micropolar (6-parameter) shells.

Remark 14 The case $\mu_c^{\text{drill}} = 0$ (i.e. $\alpha_3 - \alpha_2 = 0$) is not uniformly positive definite. However, with a slight change of the resultant shell model, one can prove the existence of minimizers using similar methods as in [42]. A linearization of such a model leads exactly to the Reissner kinematics with five degrees of freedom [42], where the in-plane drill rotation is absent. The physical meaning of the in-plane rotational stiffness $\mu_c^{\text{drill}} = \alpha_3 - \alpha_2$ in the resultant shell model is not entirely clear to us.

Since only two independent rotations are required to orient a unit director field, a distinctive feature of classical plate and shell theories is a rotation field defined in terms of only two independent degrees of freedom. Rotations about the director itself – the so-called drill rotation – are irrelevant and, for that matter, undefined in classical shell theory.

5.2. Orthotropic shells

The constitutive equations for orthotropic shells have been presented in [24] within the 6-parameter resultant shell theory. The expression of the strain energy density in terms of the tensor components defined in (67) is given by

$$2W(\mathbf{E}^e, \mathbf{K}^e) = C_{\alpha\beta\gamma\delta}^E \tilde{E}_{\alpha\beta}^e \tilde{E}_{\gamma\delta}^e + D_{\alpha\beta}^E \tilde{E}_{3\alpha}^e \tilde{E}_{3\beta}^e + C_{\alpha\beta\gamma\delta}^K \tilde{K}_{\alpha\beta}^e \tilde{K}_{\gamma\delta}^e + D_{\alpha\beta}^K \tilde{K}_{3\alpha}^e \tilde{K}_{3\beta}^e \tag{82}$$

where $C_{\alpha\beta\gamma\delta}^E$, $C_{\alpha\beta\gamma\delta}^K$, $D_{\alpha\beta}^E$ and $D_{\alpha\beta}^K$ are material constants which satisfy the following symmetry relations

$$C_{\alpha\beta\gamma\delta}^E = C_{\gamma\delta\alpha\beta}^E, \quad D_{\alpha\beta}^E = D_{\beta\alpha}^E, \quad C_{\alpha\beta\gamma\delta}^K = C_{\gamma\delta\alpha\beta}^K, \quad D_{\alpha\beta}^K = D_{\beta\alpha}^K.$$

We observe that the quadratic function (82) is coercive if and only if the following symmetric matrices are positive definite

$$\begin{bmatrix} C_{1111}^E & C_{1122}^E & C_{1112}^E & C_{1121}^E \\ C_{1122}^E & C_{2222}^E & C_{2212}^E & C_{2221}^E \\ C_{1112}^E & C_{2212}^E & C_{1212}^E & C_{1221}^E \\ C_{1121}^E & C_{2221}^E & C_{1221}^E & C_{2121}^E \end{bmatrix}, \begin{bmatrix} C_{1111}^K & C_{1122}^K & C_{1112}^K & C_{1121}^K \\ C_{1122}^K & C_{2222}^K & C_{2212}^K & C_{2221}^K \\ C_{1112}^K & C_{2212}^K & C_{1212}^K & C_{1221}^K \\ C_{1121}^K & C_{2221}^K & C_{1221}^K & C_{2121}^K \end{bmatrix}, \begin{bmatrix} D_{11}^E & D_{12}^E \\ D_{12}^E & D_{22}^E \end{bmatrix}, \begin{bmatrix} D_{11}^K & D_{12}^K \\ D_{12}^K & D_{22}^K \end{bmatrix}. \tag{83}$$

In situations where the matrices (83) are positive definite, the strain energy W given by (82) satisfies the hypotheses of Theorem 6. Then we can use our theoretical results to derive the existence of minimizers for orthotropic shells.

5.3. Composite layered shells

Let us analyze the case of composite shells made of a finite number of individually homogeneous layers. According to [13], the strain energy density of such a type of shell can be written by means of the tensor components (67) in the form

$$2W(\mathbf{E}^e, \mathbf{K}^e) = A_{\alpha\beta\gamma\delta} \tilde{E}_{\alpha\beta}^e \tilde{E}_{\gamma\delta}^e + D_{\alpha\beta\gamma\delta} \tilde{K}_{\alpha\beta}^e \tilde{K}_{\gamma\delta}^e + B_{\alpha\beta\gamma\delta} (\tilde{E}_{\alpha\beta}^e \tilde{K}_{\gamma\delta}^e + \tilde{K}_{\alpha\beta}^e \tilde{E}_{\gamma\delta}^e) + S_{\alpha\beta} \tilde{E}_{3\alpha}^e \tilde{E}_{3\beta}^e + G_{\alpha\beta} \tilde{K}_{3\alpha}^e \tilde{K}_{3\beta}^e, \tag{84}$$

where $A_{\alpha\beta\gamma\delta}$, $B_{\alpha\beta\gamma\delta}$, $D_{\alpha\beta\gamma\delta}$, $S_{\alpha\beta}$ and $G_{\alpha\beta}$ are the constitutive coefficients of composite elastic shells, which have been determined in [13] in terms of the material/geometrical parameters of the layers. They satisfy the symmetry conditions

$$A_{\alpha\beta\gamma\delta} = A_{\gamma\delta\alpha\beta}, \quad D_{\alpha\beta\gamma\delta} = D_{\gamma\delta\alpha\beta}, \quad S_{\alpha\beta} = S_{\beta\alpha}, \quad G_{\alpha\beta} = G_{\beta\alpha}.$$

In the constitutive relation (84) one can observe a multiplicative coupling of the strain tensor \mathbf{E}^e with the curvature tensor \mathbf{K}^e for composite shells. Let us denote by A , D and B the 4×4 matrices of material constants

$$A = \begin{bmatrix} A_{1111} & A_{1122} & A_{1112} & A_{1121} \\ A_{1122} & A_{2222} & A_{2212} & A_{2221} \\ A_{1112} & A_{2212} & A_{1212} & A_{1221} \\ A_{1121} & A_{2221} & A_{1221} & A_{2121} \end{bmatrix}, \quad D = \begin{bmatrix} D_{1111} & D_{1122} & D_{1112} & D_{1121} \\ D_{1122} & D_{2222} & D_{2212} & D_{2221} \\ D_{1112} & D_{2212} & D_{1212} & D_{1221} \\ D_{1121} & D_{2221} & D_{1221} & D_{2121} \end{bmatrix},$$

$$B = \begin{bmatrix} B_{1111} & B_{1122} & B_{1112} & B_{1121} \\ B_{2211} & B_{2222} & B_{2212} & B_{2221} \\ B_{1211} & B_{1222} & B_{1212} & B_{1221} \\ B_{2111} & B_{2122} & B_{2112} & B_{2121} \end{bmatrix}.$$

One can show that the necessary and sufficient condition for the coercivity of the strain energy function (84) is that the following matrices are positive definite

$$\mathbb{C} = \begin{bmatrix} A_{4 \times 4} & B_{4 \times 4} \\ B_{4 \times 4} & D_{4 \times 4} \end{bmatrix}_{8 \times 8}, \quad \mathbb{S} = \begin{bmatrix} S_{11} & S_{12} \\ S_{12} & S_{22} \end{bmatrix}_{2 \times 2}, \quad \mathbb{G} = \begin{bmatrix} G_{11} & G_{12} \\ G_{12} & G_{22} \end{bmatrix}_{2 \times 2}.$$

With these notations, one may write the strain energy density (84) in the matrix form

$$2W(\mathbf{E}^e, \mathbf{K}^e) = V \mathbb{C} V^T + (\tilde{E}_{31}^e, \tilde{E}_{32}^e) \mathbb{S} (\tilde{E}_{31}^e, \tilde{E}_{32}^e)^T + (\tilde{K}_{31}^e, \tilde{K}_{32}^e) \mathbb{G} (\tilde{K}_{31}^e, \tilde{K}_{32}^e)^T,$$

with $V = (\tilde{E}_{11}^e, \tilde{E}_{22}^e, \tilde{E}_{12}^e, \tilde{E}_{21}^e, \tilde{K}_{11}^e, \tilde{K}_{22}^e, \tilde{K}_{12}^e, \tilde{K}_{21}^e)_{1 \times 8}$.

In conclusion, if the matrices \mathbb{C} , \mathbb{S} and \mathbb{G} are positive definite, then we can apply Theorem 6 for the strain energy density given by equation (84) and prove the existence of minimizers for composite layered shells.

Remark 15 *The results and conclusions presented above are obviously valid in the case of plates as well, in other words, when the reference base surface S^0 is planar. However, many of the formulae for general shells can be significantly simplified in the case of plates, since the three orthonormal bases $\{\mathbf{a}_1, \mathbf{a}_2, \mathbf{n}^0\}$, $\{\mathbf{d}_1^0, \mathbf{d}_2^0, \mathbf{d}_3^0\}$ and $\{\mathbf{e}_1, \mathbf{e}_2, \mathbf{e}_3\}$ can be considered identical.*

The corresponding existence results for 6-parameter geometrically non-linear plates (planar shells) has been presented in [11] for isotropic and anisotropic materials, and in [12] for composite planar shells. In the case of isotropic plates, the existence theorem can be obtained from the more general results concerning Cosserat planar shells presented in [38, 42].

In a forthcoming contribution we will extend our existence results to the 6-parameter resultant shell model with physically non-linear behavior and show the invertibility of the reconstructed deformation gradient \tilde{F} .

Acknowledgements

We thank our many friends who have made substantial comments on a preliminary version of the paper.

Funding

Mircea Bîrsan is supported by the German state grant: ‘Programm des Bundes und der Länder für bessere Studienbedingungen und mehr Qualität in der Lehre’.

Conflict of interest

None declared.

References

- [1] Aganović, I, Tambača, J, and Tutek, Z. Derivation and justification of the models of rods and plates from linearized three-dimensional micropolar elasticity. *J Elast* 2006; 84: 131–152.
- [2] Aganović, I, Tambača, J, and Tutek, Z. Derivation and justification of the model of micropolar elastic shells from three-dimensional linearized micropolar elasticity. *Asympt Anal* 2007; 51: 335–361.
- [3] Altenbach, H, and Eremeyev, VA. On the linear theory of micropolar plates. *Z Angew Math Mech* 2009; 89: 242–256.
- [4] Altenbach, H, and Eremeyev, VA. Cosserat-type shells. In: Altenbach H and Eremeyev VA (eds) *Generalized continua – from the theory to engineering applications (CISM Courses and Lectures, vol. 541)*. Wien: Springer, 2013, pp. 131–178.
- [5] Altenbach, H, and Zhilin, PA. The theory of simple elastic shells. In: Kienzler R, Altenbach H and Ott I (eds) *Theories of plates and shells. Critical review and new applications (Euromech Colloquium, vol. 444)*. Heidelberg: Springer, 2004, pp. 1–12.
- [6] Altenbach, J, Altenbach, H, and Eremeyev, VA. On generalized Cosserat-type theories of plates and shells: a short review and bibliography. *Arch Appl Mech* 2010; 80: 73–92.
- [7] Antman, SS. *Nonlinear problems of elasticity*. New York: Springer, 1995.
- [8] Badur, J, and Pietraszkiewicz, W. On geometrically non-linear theory of elastic shells derived from pseudo-Cosserat continuum with constrained micro-rotations. In: Pietraszkiewicz W (ed) *Finite rotations in structural mechanics*. Berlin: Springer, 1986, pp. 19–32.
- [9] Birsan, M. Inequalities of Korn's type and existence results in the theory of Cosserat elastic shells. *J Elast* 2008; 90: 227–239.
- [10] Birsan, M, and Altenbach, H. A mathematical study of the linear theory for orthotropic elastic simple shells. *Math Methods Appl Sci* 2010; 33: 1399–1413.
- [11] Birsan, M, and Neff, P. Existence theorems in the geometrically non-linear 6-parameter theory of elastic plates. *J Elast*. In print 2012. DOI 10.1007/s10659-012-9405-2.
- [12] Birsan, M, and Neff, P. On the equations of geometrically nonlinear elastic plates with rotational degrees of freedom. *Ann Acad Rom Sci Ser Math Appl* 2012; 4: 97–103.
- [13] Chróścielewski, J, Kreja, I, Sabik, A, and Witkowski, W. Modeling of composite shells in 6-parameter nonlinear theory with drilling degree of freedom. *Mech Adv Mater Struc* 2011; 18: 403–419.
- [14] Chróścielewski, J, Makowski, J, and Pietraszkiewicz, W. *Statics and dynamics of multifold shells: Nonlinear theory and finite element method* (in Polish). Warsaw: Wydawnictwo IPPT PAN, 2004.
- [15] Chróścielewski, J, Pietraszkiewicz, W, and Witkowski, W. On shear correction factors in the non-linear theory of elastic shells. *Int J Solids Struct* 2010; 47: 3537–3545.
- [16] Ciarlet, PG. *Mathematical elasticity, volume II: Theory of plates*. 1st ed. Amsterdam: North-Holland Publishing, 1997.
- [17] Ciarlet, PG. *Introduction to linear shell theory*. Paris: Gauthier-Villars, 1998.
- [18] Ciarlet, PG. *Mathematical elasticity, volume III: Theory of shells*. 1st ed. Amsterdam: North-Holland Publishing, 2000.
- [19] Ciarlet, PG. *An introduction to differential geometry with applications to elasticity*. Dordrecht: Springer, 2005.
- [20] Cosserat, E, and Cosserat, F. *Théorie des corps déformables*. Paris: Librairie Scientifique A. Hermann et Fils, reprint 2009. (English translation by D Delphenich, 2007, PDF available at http://www.uni-due.de/~hm0014/Cosserat_files/Cosserat09_eng.pdf).
- [21] Davini, C. Existence of weak solutions in linear elastostatics of Cosserat surfaces. *Meccanica* 1975; 10: 225–231.
- [22] Eremeyev, VA, and Lebedev, LP. Existence theorems in the linear theory of micropolar shells. *Z Angew Math Mech* 2011; 91: 468–476.
- [23] Eremeyev, VA, and Pietraszkiewicz, W. The nonlinear theory of elastic shells with phase transitions. *J Elast* 2004; 74: 67–86.
- [24] Eremeyev, VA, and Pietraszkiewicz, W. Local symmetry group in the general theory of elastic shells. *J Elast* 2006; 85: 125–152.
- [25] Eremeyev, VA, and Pietraszkiewicz, W. Thermomechanics of shells undergoing phase transition. *J Mech Phys Solids* 2011; 59: 1395–1412.
- [26] Eremeyev, VA, and Zubov, LM. *Mechanics of elastic shells* (in Russian). Moscow: Nauka, 2008.
- [27] Eringen, AC. Theory of micropolar plates. *Z Angew Math Phys* 1967; 18: 12–30.
- [28] Fox, DD, and Simo, JC. A drill rotation formulation for geometrically exact shells. *Comp Meth Appl Mech Eng* 1992; 98: 329–343.
- [29] Gurtin, ME, and Murdoch, AI. A continuum theory of elastic material surfaces. *Arch Rat Mech Anal* 1975; 57: 291–323.
- [30] Ibrahimbegović, A. Stress resultant geometrically nonlinear shell theory with drilling rotations – Part I: A consistent formulation. *Comp Meth Appl Mech Eng* 1994; 118: 265–284.
- [31] Koiter, WT. A consistent first approximation in the general theory of thin elastic shells. In: Koiter WT (ed) *The theory of thin elastic shells*. Amsterdam: North-Holland Publishing, 1960, pp. 12–33.
- [32] Libai, A, and Simmonds, JG. *The nonlinear theory of elastic shells*. 2nd edn. Cambridge: Cambridge University Press, 1998.
- [33] Makowski, J, and Pietraszkiewicz, W. *Thermomechanics of shells with singular curves*. Gdańsk: Zeszyty Naukowe IMP PAN Nr 528(1487), 2002.
- [34] Murdoch, AI. A coordinate-free approach to surface kinematics. *Glasgow Math J* 1990; 32: 299–307.
- [35] Naghdi, PM. The theory of shells and plates. In: Flügge S (ed.) *Handbuch der Physik, Mechanics of Solids*, vol. VI a/2. Berlin: Springer, 1972, pp. 425–640.
- [36] Naghdi, PM, and Rubin, MB. Restrictions on nonlinear constitutive equations for elastic shells. *J Elast* 1995; 39: 133–163.

- [37] Neff, P. Some results concerning the mathematical treatment of finite multiplicative elasto-plasticity. In: Hutter K and Baaser H (eds) *SFB298: Deformation and failure in metallic and granular structures-Abschlussbericht (Lecture Notes in Applied and Computational Mechanics*, vol. 10). Heidelberg: Springer Verlag, 2003, pp. 251–274.
- [38] Neff, P. A geometrically exact Cosserat-shell model including size effects, avoiding degeneracy in the thin shell limit. Part I: Formal dimensional reduction for elastic plates and existence of minimizers for positive Cosserat couple modulus. *Cont Mech Therm* 2004; 16: 577–628.
- [39] Neff, P. The Cosserat couple modulus for continuous solids is zero viz the linearized Cauchy-stress tensor is symmetric. *Z Angew Math Mech* 2006; 86: 892–912.
- [40] Neff, P. A finite-strain elastic-plastic Cosserat theory for polycrystals with grain rotations. *Int J Eng Sci* 2006; 44: 574–594.
- [41] Neff, P. The Γ -limit of a finite strain Cosserat model for asymptotically thin domains versus a formal dimensional reduction. In: Pietraszkiewicz W and Szymczak C (eds) *Shell structures: Theory and applications*. London: Taylor and Francis Group, 2006, pp. 149–152.
- [42] Neff, P. A geometrically exact planar Cosserat shell-model with microstructure: Existence of minimizers for zero Cosserat couple modulus. *Math Models Methods Appl Sci* 2007; 17: 363–392.
- [43] Neff, P, and Chelmiński, K. A geometrically exact Cosserat shell-model for defective elastic crystals. Justification via Γ -convergence. *Interface Free Bound* 2007; 9: 455–492.
- [44] Neff, P, Fischle, A, and Münch, I. Symmetric Cauchy-stresses do not imply symmetric Biot-strains in weak formulations of isotropic hyperelasticity with rotational degrees of freedom. *Acta Mech* 2008; 197: 19–30.
- [45] Neff, P, Hong, K-I, and Jeong, J. The Reissner-Mindlin plate is the Γ -limit of Cosserat elasticity. *Math Mod Meth Appl Sci* 2010; 20: 1553–1590.
- [46] Neff, P, and Münch, I. Curl bounds Grad on $SO(3)$. *ESAIM Contr Optim Cal Var* 2008; 14: 148–159.
- [47] Paroni, R. Theory of linearly elastic residually stressed plates. *Math Mech Solids* 2006; 11: 137–159.
- [48] Paroni, R, Podio-Guidugli, P, and Tomassetti, G. The Reissner-Mindlin plate theory via Γ -convergence. *CR Acad Sci Paris, Ser I* 2006; 343: 437–440.
- [49] Pietraszkiewicz, W. Consistent second approximation to the elastic strain energy of a shell. *Z Angew Math Mech* 1979; 59: 206–208.
- [50] Pietraszkiewicz, W. *Finite rotations and Lagrangian description in the non-linear theory of shells*. Warsaw-Poznań: Polish Scientific Publishers, 1979.
- [51] Pietraszkiewicz, W. Refined resultant thermomechanics of shells. *Int J Eng Science* 2011; 49: 1112–1124.
- [52] Pimenta, PM, and Campello, EMB. Shell curvature as an initial deformation: A geometrically exact finite element approach. *Int J Num Meth Eng* 2009; 78: 1094–1112.
- [53] Pimenta, PM, Campello, EMB, and Wriggers, P. A fully nonlinear multi parameter shell model with thickness variation and a triangular shell finite element. *Comp Mech* 2004; 34: 181–193.
- [54] Reissner, E. The effect of transverse shear deformation on the bending of elastic plates. *J Appl Mech Trans ASME* 1945; 12: A69–A77.
- [55] Reissner, E. Linear and nonlinear theory of shells. In: Fung YC and Sechler EE (eds) *Thin shell structures*. Englewood Cliffs, NJ: Prentice-Hall, 1974, pp. 29–44.
- [56] Rubin, MB. *Cosserat theories: Shells, rods and points*. Dordrecht: Kluwer Academic Publishers, 2000.
- [57] Rubin, MB, and Benveniste, Y. A Cosserat shell model for interphases in elastic media. *J Mech Phys Solids* 2004; 52: 1023–1052.
- [58] Sansour, C, and Bufler, H. An exact finite rotation shell theory, its mixed variational formulation and its finite element implementation. *Int J Num Meth Eng* 1992; 34: 73–115.
- [59] Simo, JC, and Fox, DD. On a stress resultant geometrically exact shell model. Part I: Formulation and optimal parametrization. *Comp Meth Appl Mech Eng* 1989, 72: 267–304.
- [60] Sprekels, J, and Tiba, D. An analytic approach to a generalized Naghdi shell model. *Adv Math Sci Appl* 2002; 12: 175–190.
- [61] Steigmann, DJ. Two-dimensional models for the combined bending and stretching of plates and shells based on three-dimensional linear elasticity. *Int J Eng Sci* 2008; 46: 654–676.
- [62] Steigmann, DJ. Extension of Koiter's linear shell theory to materials exhibiting arbitrary symmetry. *Int J Eng Sci* 2012; 51: 216–232.
- [63] Wiśniewski, K. *Finite rotation shells: Basic equations and finite elements for Reissner kinematics*. Berlin: Springer, 2010.
- [64] Wiśniewski, K, and Turska, E. Four-node mixed Hu-Washizu shell element with drilling rotation. *Int J Num Meth Eng* 2012; 90: 506–536.
- [65] Zhilin, PA. Mechanics of deformable directed surfaces. *Int J Solids Struct* 1976; 12: 635–648.
- [66] Zubov, LM. *Nonlinear theory of dislocations and disclinations in elastic bodies*. Berlin, Heidelberg, New York: Springer, 1997.
- [67] Zubov, LM. Micropolar-shell equilibrium equations. *Dokl Phys* 2009; 54: 290–293.